

A RADIOFREQUENCY MAGNETIC FIELD RESONATOR AND A METHOD OF
DESIGNING THE SAME

FIELD AND BACKGROUND OF THE INVENTION

5 The present invention relates to magnetic resonance analysis and, more particularly, to a radiofrequency (RF) resonator for generating a substantially homogenous RF magnetic field for the purpose of magnetic resonance analysis. The present invention further relates to a method of designing the RF resonator, a magnetic resonance imaging (MRI) apparatus incorporating the RF resonator and a method of
10 magnetic resonance analysis of an object.

 MRI is a method to obtain an image representing the chemical and physical microscopic properties of materials, by utilizing a quantum mechanical phenomenon, known as Nuclear Magnetic Resonance (NMR), in which a system of spins, placed in a magnetic field resonantly absorb energy, when applied with a certain frequency.

15 A nucleus can experience NMR only if its nuclear spin is not zero, *i. e.*, the nucleus has at least one unpaired nucleon. When placed in a magnetic field, a nucleus having a spin is allowed to be in a discrete set of energy levels, the number of which is determined by the spin, and the separation of which is determined by the gyromagnetic ratio of the nucleus and by the magnetic field. Under the influence of a small
20 perturbation, manifested as an RF magnetic field, which rotates about the direction of a primary static magnetic field, the nucleus has a time dependent probability to experience a transition from one energy level to another. With a specific frequency of the rotating magnetic field, the transition probability may reach the value of unity. Hence at certain times, a transition is forced on the nucleus, although the rotating
25 magnetic field may be of small magnitude relative to the primary static magnetic field. For an ensemble of nuclei the transitions are realized through a change in the overall magnetization.

 Most MRI systems use a static magnetic field having a predetermined gradient, so that a unique magnetic field is generated at each region of the analyzed object. By
30 detecting the NMR signal, knowing the magnetic field gradient, the position of each region of the object can be imaged. Typical MRI systems include a main magnet generating a uniform static magnetic field, whereas gradients in predetermined directions are obtained by providing additional coils which generate the desired gradients.

The rotating magnetic field in MRI systems is provided by an RF resonator, also known as RF coil, RF probe or RF antenna. The process of imaging or analyzing an object (*e. g.*, a patient or a sample) is as follows. When pulse sequences are applied to the RF resonator, an RF radiation is emitted onto the object. According to the
5 above principles, the RF radiation triggers NMR signals from the object from which information is obtained and subsequently used to reconstruct images and/or to analyze the object. In most MRI systems, the RF resonator is used both for transmitting the RF radiation and for detecting the resulting NMR signals from the object. RF resonators are required to generate a very uniform RF magnetic field, as any
10 inhomogeneity in the RF magnetic field causes identical spins at different locations within the imaged object to respond differently to the RF radiation thereby distorting the image or negatively affecting the quality of the analysis. It is recognized that RF resonators which generate inhomogeneous magnetic fields also have inhomogeneous sensitivity and that RF resonators generating a weak magnetic field also detect weak
15 NMR signals.

In addition to the homogeneity requirement, the RF magnetic field generated by the RF resonator is required to have a resonance frequency which matches the resonance frequency of the nuclear spins in the imaged sample. A known phenomenon is that once a sample is inserted into the RF magnetic field, the resonance
20 frequency is shifted. Thus, RF resonators are typically equipped with appropriate circuitries which tune and rematch the resonance frequencies of the RF resonator and the sample. To increase signal-to-noise-ratio (SNR) and to optimize the efficiency of the system, it is also desirable that the size of the RF resonator will be comparable to the size of the sample.

25 Many RF resonators are presently known, and can be categorized into two groups, commonly referred to as the group of surface resonators and the group of volume resonators.

Figure 1 illustrates a surface resonator, known as the single-loop coil [M.R. Bendall, "Surface Coil Technology", *Magnetic Resonance Imaging*, ed. by C.L. Partain *et al.*, Philadelphia, 1988]. The single-loop coil is a planar current-loop, which
30 is sensitive to RF fields, designated herein by B_1 , in the direction perpendicular to the loop surface. The single-loop coil is characterized by a high SNR, however, its

effective homogenous RF field is only near the surface, or the plane, of the current-loop. Thus, the single-loop coil is highly inhomogeneous.

Figure 2 illustrates another surface RF resonator, known as the phased array coil [Sodickson DK and Manning WJ., "Simultaneous acquisition of spatial harmonics (SMASH): ultra-fast imaging with RF coil arrays", *Proc. Fifth Scientific Meeting of the International Society for Magnetic Resonance in Medicine*, 1817 (1997); Klass P. Pressmann, *et al.*, "SENSE: Sensitivity Encoding for fast MRI", *Magnetic Resonance in Medicine*, 42:952, 1999]. The phased array coil is an array of a number of single-loop coils, where the phases of the single-loop coils are designed so that the matrix representing their signals is can be diagonalized. The volume of interest of the phased array coil is the combined near-surface of each single unit of the array.

As opposed to the surface resonators, where the effective imaged region is a surface (*i. e.*, two-dimensional space), in the group of volume resonators the effective imaged region is a volume (three-dimensional space). Figure 3 illustrates a volume RF resonator known as a saddle coil [D.W. Alderman *et al.*, *J. Magn. Reson.* 36, 447, 1979]. The saddle coil is made of a combination of two current-loops, wrapped around a lateral surface area of a cylinder, so that the magnetic fields of the two current-loops combine. In some saddle coils each loop is made a multi-loop structure in a spiral manner.

Figure 4 illustrates another volume RF resonator known as the multi-turn solenoid [D.I. Hoult and P.C. Lauterbour, J., "The Sensitivity of Zeugmatographic Experiment Involving Human Samples" *Magn. Reson.*, 34:425, 1979]. The multi-turn solenoid is a structure which generates a very homogenous magnetic field within a cylindrical volume. The multi-turn solenoid is rarely used in MRI because the magnetic field is parallel to the cylinder axis and is therefore orthogonal to the symmetry of clinical systems where the RF field is to be orthogonal to the longitudinally oriented main static magnetic field.

Figure 5 illustrate an additional volume RF resonator known as the single-turn solenoid [J.P. Hornak, *et al.*, "Elementary Single Turn Solenoids Used in the Transmitter and Receiver in Magnetic Resonance Imaging", *Magn. Reson. Imag.*, 5: 233-237, (1987)]. The single-turn solenoid formed by a broad sheet instead of a multi-turn structure. Conceptually, it is very similar to the conventional solenoid, thus, it suffers from similar limitations as the multi-turn solenoid and it is therefore used only

for imaging of particular samples, such as the breast and forearm. One type of single-turn solenoid is the perforated single-turn solenoid which is a single-turn solenoid with one or more perforations in its cylinder. The perforated single-turn solenoid is suitable for imaging of head, knee, elbow, wrist and shoulder.

5 Figure 6 illustrates the most common volume RF resonator for clinical imaging, known as the birdcage resonator or the birdcage coil [C.E. Hayse *et al.*, "An Efficient Highly Homogeneous Radiofrequency Coil for Whole-Body NMR Imaging at 1.5T", *J. Magn. Reson.*, 63:622-628, 1985; J. Tröpp, "The theory of the bird-cage resonator", *J. Magn. Reson.* 1989; 82, 51-62; T.A. Riauka *et al.*, "A numerical
10 approach to non-circular birdcage RF coil optimization: Verification with a fourth-order coil", *Magnetic Resonance in Medicine*, 41:1180-1188, 1999; Jianming J. "Electromagnetic analysis and design in magnetic resonance imaging", CRC Press, New York, 1999]. The birdcage coil is a very homogenous resonator which is formed from a number of equally spaced conductors on a cylindrical surface. It is common to
15 refer to conductors which are longitudinally oriented with respect to the symmetry axis of the cylinder as "legs" or "rungs", and to conductors which are transversally oriented as "end-rings". Capacitors are located on the legs, on the end-rings or both on the legs and the end-rings.

 Currents flowing in the legs and end-rings obey an eigenvalue equation which
20 is characterized by a set of eigenvectors, also known as current-modes. Each current-mode corresponds to a set of currents flowing in the legs, and is associated to an eigenvalue which is related to one possible solution of resonant frequency. Specifically, a birdcage coil with N legs has N resonant frequencies and N current-modes. For a linear birdcage, one special current-mode, has a sinusoidal current
25 distribution among the legs of each side along the circumference. In this mode, the magnetic field inside the resonator is very homogenous. It is known that the homogeneity level of the field is proportional to the number of legs, where an infinite number of legs incorporate a desired mode corresponding to an RF field having a perfect homogeneity.

30 However, as the number of current-modes increases, so does the complexity of the birdcage coil design. The undesired current-modes of the birdcage coil, except for intrinsically orthogonal cosine mode, reduce the field homogeneity and/or the transmission and detection power. Thus, when designing a birdcage coil, one needs to

eliminate all current-modes other than the desired mode to ensure a homogenous field. This is typically done by designing a birdcage coil where the desired mode resonant frequency is significantly spaced apart from all the other frequencies. An additional factor which is to be considered when selecting the number of birdcage coil legs is the physiological effect of a large number of legs on the patient which may become claustrophobic.

An inherent limitation of the birdcage coil is that in the design process, both the magnetic field characteristic and the resonance characteristic of the birdcage coil are to be simultaneously calculated, as these two characteristics are entangled. Any change in the number of legs and separation therebetween and the location of the capacitors and the type thereof alters both the RF field lines and the resonant frequency of the coil.

Moreover, the simulations preceding the manufacturing of the birdcage coil exhibits a very homogenous RF magnetic field. In practice, however, once a sample is inserted into the coil, the resonance frequency and the tuning impedance of the coil are shifted. Although this effect can be approximated during simulation, the validity of such approximation is very limited due to the various sizes, structures and orientations that a biological organ may exhibit when placed in the birdcage coil, contrary to the spherical or cylindrical uniform sample that is typically used for simulations. Thus, the resonance frequency and the tuning impedance must be retuned by an arrangement of tunable capacitors, which has to be electrically connected to the birdcage coil. Theoretically, N tunable capacitors can correct some of the sample effects, but for practical reasons only a few capacitors are used. The additional capacitors break the symmetry of the birdcage coil, result in loosing field homogeneity and introduce non-zero contributions from one or more undesired current-modes. In realistic birdcage coils, the inhomogeneity of the RF field may approach 15-20 %.

Additional prior art of relevance is a volume RF resonator known as the Litz coil, disclosed in U.S. Patent No. 6,060,882 and illustrated in Figure 7. The coil is based on Litz foil conductor, which includes multiple and parallel Litz wires with interwoven sub-routes from a first node to a second node and insulated crossovers forming well-defined flux sub-windows. The structure of the coil results in multiple current routes each contribute to the RF magnetic field, B_1 , leaving a central flux window centered on the B_1 axis. An identical semi-coil, formed on the opposite side

of the sample around completes the coil. The two semi-coils are electrically connected in parallel. This coil solves some of the problems associated with the birdcage coil, however its design and manufacturing is still rather complicated. Specifically, the Litz coil efficiency depends on the number of braids and on their thickness. Hence, for a sufficiently efficient Litz coil the braiding is very complex and ultra thin.

Also of prior art of relevance is the so-called "Slotted Tube Resonator" [H. J. Schneider and P. Dullenkopf, "Slotted Tube Resonator: A new NMR probe head at high observing frequencies", *Rev. Sci. Instrum.*, 48:68-73, 1977]. This resonator is composed of a conducting tube which is cut lengthwise, thereby forming a strip line which consists of two arched conductors. The slotted tube resonator is coupled to an electronic circuitry, which includes two independently operating capacitors, a series capacitor for matching the resonant characteristics of the resonator and a shunting capacitor for tuning the impedance of the resonator.

An improved type of the slotted tube resonator [D. H. Hong *et al.*, "Whole Body Slotted Tube Resonator for Proton NMR Imaging at 2.0 Tesla", *Magn. Res. Imag.*, 5:239-243, 1987;], incorporates a coupling sheet, positioned externally to the tube arches, for linking the resonator with the transmitter and/or the receiver of the imaging system. In addition, the improved slotted tube resonator includes additional capacitors forming a capacity coupling between the two tube arches.

One application of the slotted tube resonator, designed specifically for analyzing hearts of rabbits of different sizes, is described in G. J. Kost, "A Cylindrical-Window NMR Probe with Extended Tuning Range Studies of the Developing Heart", *J. Magn. Res.* 82:238-252, 1989. This coil is cylindrical and it is formed with a window in the cylinder wall. Unlike the multi- and single-turn solenoids, the produced magnetic field of the cylindrical windowed coil is directed perpendicularly to the symmetry axis of the cylinder. This coil, however, is suitable only for non-imaging applications of small sized samples.

Other slotted tube resonators are described in S. Bobroff and M. J. McCarthy, "Variations on the Slotted-Tube Resonator: Rectangular and Elliptical Coils", *Magn. Res. Imag.*, 17:783-789, 1999; M. K. Murphy *et al.*, "A Comparison of Three Radiofrequency Coils for NMR Studies of Conductive Samples", *Magn. Res. in Med.*, 12:382-389, 1989; T. Sphicopoulos and F. Gardiol, "Slotted Tube Cavity: a Compact Resonator With Empty Core", *IEE Proceedings*, 134:405-410; A. Darrasse *et al.*,

"The slotted cylinder: an efficient probe for NMR imaging, *Magnetic Resonance in Medicine*, 2(1):20-8, 1985; H. J. Schneider and P. Dullenkopf, "Crossed Slotted Tube Resonator: A new Double resonance NMR probehead ", *Rev. Sci. Instrum.*, 48:832-834, 1977; D. W. Alderman and D. M. Grant, "An Efficient Decoupler Coil Design which Reduces Heating in Conductive Samples in Superconducting Spectrometers", *J. Magn. Res.*, 36:447-451, 1979; S. Crozier *et al.*, "In Vivo Localized ¹H NMR Spectroscopy at 11.7 Tesla", *J. Magn. Res.*, 94:123-132, 1991; C. Ranasinghage *et al.*, "Resonator Coils for magnetic resonance imaging at 6 MHz", *Med. Phys.* 15:235-240, 1988; and T. A. Gross *et al.*, "Radiofrequency Resonators for High-Field Imaging and Double-Resonance Spectroscopy", *J. Magn. Res.*, 62:87-98, 1985.

It will be appreciated that, all of the prior art slotted tube resonators suffer from two crucial limitations: (i) the slotted tube resonator fails to provide a mechanism for balancing the RF field homogeneity once it has deviated from its original design due to sample-field interactions; and (ii) the geometrical configuration of the slotted tube resonator is such that the generated RF magnetic field has a linear polarization. An intrinsic limitation of the linear polarization is the power losses, which are explained by wasted components in the mathematical expansion of the linear polarization. In a theoretical study of current distributions and field uniformity in saddle coils [J. W. Carlson, "Currents and Fields of Thin Conductors in RF Saddle Coils", *Magn. Res. in Med.*, 3:778-790, (1986)] an optimal geometry for circular polarized coil has been calculated.

In this respect, one coil for generating a circular polarized magnetic field is of the birdcage type described above, also known as the quadrature birdcage coil, in which intrinsically orthogonal sine and cosine modes are incorporated. A particularly interesting quadrature birdcage coil is described in an article by H. Barfuss *et al.*, entitled "In Vivo Magnetic Resonance Imaging and Spectroscopy of Humans with a 4T Whole-body Magnet", published in *NMR in Biomedicine*, 3:31-45. This birdcage coil consists of four longitudinal and two transverse copper foils, interconnected via a system of capacitors. The coil is further equipped with additional rotary differential capacitors for providing continuous distribution between the tuning and matching capacitors, thereby allowing variation of the quality factor of the coil. However, this birdcage coil only partially addresses to problems associated with effects of interaction between the magnetic field and the imaged object. Specifically, this birdcage coil,

although successfully providing a sophisticated circuitry for tuning the resonance characteristics and matching the impedance, fails to provide a satisfactory mechanism for correcting inhomogeneity in the magnetic field once a sample is placed therein.

There is thus a widely recognized need for, and it would be highly advantageous to have, an RF resonator and a method of designing the same, devoid of the above limitations.

SUMMARY OF THE INVENTION

According to one aspect of the present invention there is provided a radiofrequency (RF) resonator for magnetic resonance analysis, the RF resonator comprising: (a) at least two conductive elements, each having a first curvature along a direction perpendicular to a longitudinal axis, the at least two conductive elements being spaced along the longitudinal axis, so that when an RF current flows within the at least two conductive elements in a direction of the longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to the longitudinal axis, is produced in a volume defined between the at least two conductive elements; and (b) an electronic circuitry designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with the electronic circuitry, and for balancing the RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to the longitudinal axis.

According to another aspect of the present invention there is provided a method of designing a radiofrequency (RF) resonator for magnetic resonance analysis, the method comprising: (a) selecting at least two surfaces to engage at least two conductive elements, the at least two surfaces having a first curvature along a direction perpendicular to a longitudinal axis, thereby defining a geometry between the at least two surfaces; (b) using the geometry for calculating a magnetic field within the ; (c) iteratively repeating the steps (a) and (b) so as to provide optimized geometry corresponding to a substantially homogenous magnetic field; and (d) using the optimized geometry and the substantially homogenous magnetic field for designing an electronic circuitry for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with the electronic circuitry, and for balancing

the RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to the longitudinal axis.

According further features in the preferred embodiments described below, the matching is by varying mutual capacitance.

5 According to still further features in the described preferred embodiments the matching is by varying mutual inductance.

According to still further features in the described preferred embodiments the calculating the magnetic field within the geometry is by solving Maxwell's equations.

10 According to still further features in the described preferred embodiments the calculating the magnetic field within the geometry is by finite element method.

According to still further features in the described preferred embodiments the calculating the magnetic field within the geometry is by moments analysis method.

15 According to still further features in the described preferred embodiments the method further comprising designing an RF shield for minimizing electromagnetic interactions between the RF resonator and at least one gradient coil and/or between the RF resonator and a device for providing a static magnetic field.

According to still further features in the described preferred embodiments the designing an RF shield is by the method of images.

20 According to still further features in the described preferred embodiments the method further comprising designing at least one end-cap to be positioned adjacent to at least one end of the RF resonator for minimizing magnetic field inhomogeneities along the longitudinal axis.

25 According to still further features in the described preferred embodiments the method further comprising designing at least one additional conductive element, so as to further minimize inhomogeneity of the magnetic field.

According to still further features in the described preferred embodiments a phase of an RF current flowing through the at least one additional conductive element equals a phase of currents flowing through the at least two conductive elements.

30 According to still further features in the described preferred embodiments an RF current flowing through the at least one additional conductive element depends on currents flowing through the at least two conductive elements, through a predetermined function.

According to still further features in the described preferred embodiments an RF current flowing through the at least one additional conductive element is a predetermined fraction of currents flowing through the at least two conductive elements.

5 According to yet another aspect of the present invention there is provided an apparatus for magnetic resonance analysis, the apparatus comprising: (a) a device for providing a static magnetic field; (b) a processing unit; and (c) an RF resonator coupled to an RF transmitter, the RF resonator comprising: at least two conductive elements, each having a first curvature along a direction perpendicular to a
10 longitudinal axis, the at least two conductive elements being spaced along the longitudinal axis, so that when an RF current flows within the at least two conductive elements in a direction of the longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to the longitudinal axis, is produced in a volume defined between the at least two conductive elements; and an electronic circuitry
15 designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of the RF transmitter, and for balancing the RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to the longitudinal axis.

20 According to still another aspect of the present invention there is provided a method for Magnetic Resonance analysis of an object, the method comprising: applying a static magnetic field on the subject in a direction of a longitudinal axis; applying a substantially homogenous RF magnetic field on the subject, in a direction perpendicular to the longitudinal axis; and acquiring nuclear magnetic resonance
25 parameters from the object, thereby analyzing the object; wherein the applying the substantially homogenous RF magnetic field is by a RF resonator coupled to an RF transmitter, the RF resonator comprising: at least two conductive elements, each having a first curvature along a direction perpendicular to the longitudinal axis, the at least two conductive elements being spaced along the longitudinal axis, so that when
30 an RF current flows within the at least two conductive elements in a direction of the longitudinal axis, the substantially homogenous RF magnetic field, is produced in a volume defined between the at least two conductive elements; and an electronic circuitry designed and configured for providing predetermined resonance

characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with the electronic circuitry, and for balancing the RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to the longitudinal axis.

5 According to further features in the preferred embodiments described below, the method further comprising balancing the RF magnetic field using a balancing adjuster electrically communicating with the electronic circuitry.

10 According to still further features in the described preferred embodiments the RF resonator further comprising at least one additional conductive element positioned so as to further minimize inhomogeneity of the magnetic field.

 According to still further features in the described preferred embodiments a phase of an RF current flowing through the at least one additional conductive element equals a phase of the RF current flowing through the at least two conductive elements.

15 According to still further features in the described preferred embodiments the RF resonator is characterized by two phases of RF currents, the two phases differ by 180 degrees.

 According to still further features in the described preferred embodiments the method further comprising applying at least one gradient pulse on the object.

20 According to still further features in the described preferred embodiments a separation between the at least two conductive elements is selected so as to surround the object.

 According to still further features in the described preferred embodiments the method further comprising preserving the at least two conductive elements at a sufficiently low temperature.

25 According to still further features in the described preferred embodiments the applying the substantially homogenous RF magnetic field is by at least one additional RF resonator.

30 According to still further features in the described preferred embodiments the at least one additional RF resonator is arranged with the RF resonator to form an RF resonator array.

 According to still further features in the described preferred embodiments the method further comprising electrically decoupling the RF resonator from the at least one additional RF resonator.

According to still further features in the described preferred embodiments the method further comprising electromagnetically decoupling the RF resonator from the at least one additional RF resonator.

5 According to still further features in the described preferred embodiments each of the at least two conductive elements has a predetermined capacitance distribution for minimizing effects of the object on the magnetic field and for minimizing corona discharge from the at least two conductive elements.

According to an additional aspect of the present invention there is provided an RF resonator for magnetic resonance analysis, the RF resonator comprising: (a) at
10 least two conductive elements, each having a first curvature along a direction perpendicular to a longitudinal axis, the at least two conductive elements being spaced along the longitudinal axis, so that when an RF current flows within the at least two conductive elements in a direction of the longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to the longitudinal axis, is produced in a
15 volume defined between the at least two conductive elements; and (b) at least one additional conductive element, electrically communicating with the at least two conductive elements in a manner such that a phase of an RF current flowing through the at least one additional conductive element equals a phase of at least one of the RF currents flowing through the at least two conductive elements.

20 According to further features in the preferred embodiments described below, the RF resonator further comprising an electronic circuitry designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with the electronic circuitry, and for balancing the RF
25 magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to the longitudinal axis.

According to still further features in the described preferred embodiments the RF resonator further comprising means for preserving the at least two conductive elements at a sufficiently low temperature.

30 According to yet an additional aspect of the present invention there is provided an apparatus for magnetic resonance analysis, the apparatus comprising: (a) a device for providing a static magnetic field; (b) a processing unit; and (c) an RF resonator coupled to an RF transmitter, the RF resonator comprising: at least two conductive

elements, each having a first curvature along a direction perpendicular to a longitudinal axis, the at least two conductive elements being spaced along the longitudinal axis, so that when an RF current flows within the at least two conductive elements in a direction of the longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to the longitudinal axis, is produced in a volume defined between the at least two conductive elements; and at least one additional conductive element, electrically communicating with the at least two conductive elements in a manner such that a phase of an RF current flowing through the at least one additional conductive element equals a phase of at least one of the RF currents flowing through the at least two conductive elements.

According to further features in the preferred embodiments described below, the RF resonator further comprising an electronic circuitry designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of the RF transmitter, and for balancing the RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to the longitudinal axis.

According to still further features in the described preferred embodiments the RF resonator further comprising a balancing adjuster electrically communicating with the electronic circuitry, the balancing adjuster is constructed and designed for controlling the electronic circuitry while the RF resonator is in medical use.

According to still further features in the described preferred embodiments an RF current flowing through the at least one additional conductive element depends on the RF currents flowing through the at least two conductive elements, through a predetermined function.

According to still further features in the described preferred embodiments the predetermined function is selected from the group consisting of a linear function, a polynomial function, an exponential function, a rational function, a power function and any combination thereof.

According to still further features in the described preferred embodiments an RF current flowing through the at least one additional conductive element is a predetermined fraction of the RF currents flowing through the at least two conductive elements.

According to still further features in the described preferred embodiments the predetermined fraction is one half.

According to still further features in the described preferred embodiments the device for providing the static magnetic field comprises at least one shim coil.

5 According to still further features in the described preferred embodiments the apparatus further comprising at least one gradient coil.

 According to still further features in the described preferred embodiments the apparatus further comprising an RF shield constructed and designed for minimizing electromagnetic interactions between the at least one gradient coil and the device for
10 providing a static magnetic field.

 According to still further features in the described preferred embodiments the apparatus further comprising at least one end-cap positioned adjacent to at least one end of the RF resonator, the at least one end-cap constructed and designed for minimizing magnetic field inhomogeneities along the longitudinal axis.

15 According to still further features in the described preferred embodiments the RF resonator is coupled to the RF transmitter via a transmission line.

 According to still further features in the described preferred embodiments the RF resonator is coupled to the RF transmitter via an RF antenna.

 According to still further features in the described preferred embodiments the
20 electronic circuitry comprises means for varying mutual capacitance.

 According to still further features in the described preferred embodiments the electronic circuitry comprises means for varying mutual inductance.

 According to still further features in the described preferred embodiments the mutual inductance is defined between the RF resonator and the RF transmitter.

25 According to still further features in the described preferred embodiments the mutual inductance is defined between the electronic circuitry and the RF transmitter.

 According to still further features in the described preferred embodiments the electronic circuitry comprises an arrangement of capacitors, inductors, tunable capacitors and tunable inductors.

30 According to still further features in the described preferred embodiments the capacitors and the tunable capacitors are high power capacitors.

 According to still further features in the described preferred embodiments the high power capacitors are vacuum capacitors.

According to still further features in the described preferred embodiments a longitudinal dimension of the at least two conductive elements is selected so as to minimize magnetic field inhomogeneities along the longitudinal axis.

According to still further features in the described preferred embodiments a
5 separation between the at least two conductive elements is selected so as to surround an object to be imaged.

According to still further features in the described preferred embodiments the object is a mammal.

According to still further features in the described preferred embodiments the
10 object is an organ of a mammal.

According to still further features in the described preferred embodiments the object is a tissue.

According to still further features in the described preferred embodiments the object is a swollen elastomer.

15 According to still further features in the described preferred embodiments the object is a food material.

According to still further features in the described preferred embodiments the object is liquid.

According to still further features in the described preferred embodiments the
20 object is at least one type of molecules present in the solvent.

According to still further features in the described preferred embodiments the at least one type of molecules present in the solvent is selected from the group consisting of molecule dissolved in the solvent, a molecule dispersed in the solvent and a molecule emulsed in the solvent.

25 According to still further features in the described preferred embodiments the first curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

According to still further features in the described preferred embodiments at
30 least one of the at least two conductive elements further has a second curvature along a direction parallel to the longitudinal axis.

According to still further features in the described preferred embodiments the first curvature and the second curvature are each independently constant curvatures.

According to still further features in the described preferred embodiments the first curvature and the second curvature are each independently variable curvatures.

According to still further features in the described preferred embodiments the second curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and
5 a curvature of an irregular surface.

According to still further features in the described preferred embodiments a number of the at least two conductive elements is selected so that the substantially homogenous RF magnetic field is linearly polarized.

10 According to still further features in the described preferred embodiments a number of the at least two conductive elements is selected so that the substantially homogenous RF magnetic field is substantially circularly polarized.

According to still further features in the described preferred embodiments the at least two conductive elements are two conductive elements.

15 According to still further features in the described preferred embodiments the at least two conductive elements are four conductive elements.

According to still further features in the described preferred embodiments a first pair of the four conductive elements is magnetically decoupled from a second pair of the four conductive elements.

20 According to still further features in the described preferred embodiments a first pair of the four conductive elements is electrically decoupled from a second pair of the four conductive elements.

According to still further features in the described preferred embodiments a first pair of the four conductive elements is electromagnetically decoupled from a
25 second pair of the four conductive elements.

According to still further features in the described preferred embodiments a first pair and a second pair of the four conductive elements are positioned so that a transverse axis of the first pair is substantially perpendicular to a transverse axis of the second pair.

30 According to still further features in the described preferred embodiments the at least two conductive elements are made of a superconducting material.

According to still further features in the described preferred embodiments the apparatus further comprising means for preserving the at least two conductive elements at a sufficiently low temperature.

According to still further features in the described preferred embodiments the
5 apparatus further comprising at least one additional RF resonator arranged with the RF resonator to form an RF resonator array.

According to still further features in the described preferred embodiments the apparatus further comprising decoupling means for decoupling the RF resonator from the at least one additional RF resonator.

10 According to still further features in the described preferred embodiments the apparatus further comprising decoupling means for decoupling the RF resonator from the at least one gradient coil.

According to still further features in the described preferred embodiments the decoupling means comprise DC block capacitors.

15 According to still further features in the described preferred embodiments the array is a phased array.

According to still further features in the described preferred embodiments the RF resonator is a multi frequency RF resonator.

20 According to still further features in the described preferred embodiments each of the at least two conductive elements has a predetermined capacitance distribution for minimizing effects of an object to be imaged on the magnetic field and for minimizing corona discharge from the at least two conductive elements.

According to still further features in the described preferred embodiments the at least two conductive elements are designed and constructed to minimize eddy
25 currents generated therein.

According to still further features in the described preferred embodiments the at least two conductive elements are characterized by an RF shield structure, for substantially blocking RF radiation while transmitting low frequency radiation.

The present invention successfully addresses the shortcomings of the presently
30 known configurations by providing an RF resonator and a method of designing an RF resonator, which enjoy properties far exceeding the prior art.

Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which

this invention belongs. Although methods and materials similar or equivalent to those described herein can be used in the practice or testing of the present invention, suitable methods and materials are described below. In case of conflict, the patent specification, including definitions, will control. In addition, the materials, methods, and examples are illustrative only and not intended to be limiting.

Implementation of the method and system of the present invention involves performing or completing selected tasks or steps manually, automatically, or a combination thereof. Moreover, according to actual instrumentation and equipment of preferred embodiments of the method and system of the present invention, several selected steps could be implemented by hardware or by software on any operating system of any firmware or a combination thereof. For example, as hardware, selected steps of the invention could be implemented as a chip or a circuit. As software, selected steps of the invention could be implemented as a plurality of software instructions being executed by a computer using any suitable operating system. In any case, selected steps of the method and system of the invention could be described as being performed by a data processor, such as a computing platform for executing a plurality of instructions.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is herein described, by way of example only, with reference to the accompanying drawings. With specific reference now to the drawings in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only, and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show structural details of the invention in more detail than is necessary for a fundamental understanding of the invention, the description taken with the drawings making apparent to those skilled in the art how the several forms of the invention may be embodied in practice.

In the drawings:

FIG. 1 is a schematic illustration of a prior art single-loop coil;

FIG. 2 is a schematic illustration of a prior art phased array coil;

FIG. 3 is a schematic illustration of a prior art saddle coil;

FIG. 4 is a schematic illustration of a prior art multi-turn solenoid;

FIG. 5 is a schematic illustration of a prior art single-turn solenoid;

FIG. 6 is a schematic illustration of a prior art birdcage coil;

FIG. 7 is a schematic illustration of a prior art Litz coil;

5 FIGs. 8a-c are schematic illustrations of a radiofrequency resonator for magnetic resonance analysis, according to the present invention;

FIG. 9 is a flowchart of a method of designing a radiofrequency resonator for magnetic resonance analysis, according to the present invention;

10 FIG. 10 is a block diagram illustrating an MRI apparatus, according to the present invention;

FIG. 11 is a flowchart of a method for magnetic resonance analysis of an object, according to the present invention;

15 FIGs. 12a-f show the calculated equipotential lines of the field, for various profiles of the conductive elements of a prototype linear RF resonator, according to the present invention;

FIG. 13 is a schematic illustration of a circuit for AC simulations, according to the present invention;

FIG. 14 shows the simulated potential and potential difference between various points in the circuit of Figure 13, according to the present invention;

20 FIG. 15 is a schematic illustration of the experimental setup of the prototype linear RF resonator, according to the present invention;

FIGs. 16a-b show profile and statistical characteristics of the RF magnetic field through an axial slice of a phantom, imaged by the prototype linear RF resonator, according to the present invention;

25 FIGs. 17a-b show profile and statistical characteristics of the RF magnetic field through a coronal slice of a phantom, imaged by the prototype linear RF resonator, according to the present invention;

30 FIGs. 18a-b show profile and statistical characteristics of the RF magnetic field through a sagittal slice of a phantom, imaged by the prototype linear RF resonator, according to the present invention;

FIGs. 19a-d show axial spin echo slices in a rat head, imaged by the prototype linear RF resonator according to the present invention;

FIG. 20 is a schematic illustration of a top view of a quadrature RF resonator, according to the present invention;

FIG. 21 is a schematic illustration of electrical currents induced onto the surfaces of the conductive elements of the quadrature RF resonator, according to the present invention;

FIG. 22 is a schematic illustration of the voltage configuration of the quadrature RF resonator, according to the present invention;

FIG. 23a shows calculated electric potential of the quadrature RF resonator, according to the present invention; and

FIG. 23b shows calculated electric potential and electric field of the quadrature RF resonator, according to the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is of an RF magnetic field resonator which can be used for magnetic resonance analysis, such as MRI. Specifically, the present invention is of a simple-designed RF resonator which can be used to provide a substantially homogeneous RF magnetic field in an MRI apparatus. The present invention is further of a method of designing the RF resonator, an MRI apparatus incorporating the RF resonator and a method of magnetic resonance analysis of an object using the RF resonator.

The principles and operation of an RF resonator according to the present invention may be better understood with reference to the drawings and accompanying descriptions.

Before explaining at least one embodiment of the invention in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of the components set forth in the following description or illustrated in the drawings. The invention is capable of other embodiments or of being practiced or carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein is for the purpose of description and should not be regarded as limiting.

According to one aspect of the present invention there is provided an RF resonator for magnetic resonance analysis, generally referred to herein as RF resonator 10.

Referring now to the drawings, Figures 8a-c illustrate RF resonator **10**, which comprises at least two conductive elements **12**, spaced along a longitudinal axis **14**, where each conductive element has a first curvature along a direction perpendicular to longitudinal axis **14**. According to a preferred embodiment of the present invention
5 any number (larger than two) of conductive elements may be used. Hence, an example of two conductive elements configuration is shown in Figure 8a, and an example of four conductive elements configuration is shown in Figure 8b. Anti-parallel RF currents **16**, flowing within conductive elements **12** in a direction of longitudinal axis **14**, generate an RF magnetic field **18** in a volume **20**, defined
10 between conductive elements **12**.

Magnetic field **18** is directed perpendicular to longitudinal axis **14**, and it is substantially homogenous. A preferred characterization of the homogeneity of magnetic field **18** is a magnetic field variation which is less than about 20 % within about 80 % of volume **20**. More preferably, the homogeneity of magnetic field **18** is
15 characterized by a magnetic field variation which is less than about 5 % within about 50 % of volume **20**.

As used herein the term "about" refers to $\pm 10\%$.

RF resonator **10** further comprises an electronic circuitry **22** which, as further detailed hereinunder, is primarily designed and configured for three purposes, which
20 are considered as three degrees-of-freedom of RF resonator **10**: (i) providing predetermined resonance characteristics of RF resonator **10**; (ii) matching an impedance of RF resonator **10** to an impedance of an RF transmitter **24** electrically communicating with electronic circuitry; and (iii) balancing the RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis (*i.e.*,
25 perpendicular to longitudinal axis **14**), hence correcting sample effects on circuitry **22**.

Before providing a further detailed description of RF resonator **10**, as delineated hereinabove and in accordance with the present invention, attention will be given to the advantages and potential applications offered thereby.

Hence, the construction and the design of RF resonator **10** allows for
30 optimizing the RF magnetic field generated therein so that the amount of RF field inhomogeneity is substantially minimize, even when RF resonator **10** is loaded with an object. More specifically, RF resonator **10** enjoys properties exceeding all prior art coils, such as surface coils, birdcage coils and slotted tube coils (for further description

of these prior art coils, see the drawings and the accompanied description in the Background section hereinabove).

With respect to prior art surface coils, whereas the transverse field of such coils is very inhomogeneous except for a narrow surface, the magnetic field generated by RF resonator **10** is substantially homogenous throughout the volume defined between conductive elements **12**, thus, the entire object of interest can be imaged to a large extent of quality.

With respect to prior art birdcage coils, although, theoretically, the large number of difference-phased current-loops in these coils (typically of the order of ten) allow for generating a homogenous RF field, birdcage coils are associated with an inherent limitation, in which the number of tunable capacitors which are needed to match and tune the birdcage coil is impractical. Hence, as stated, some capacitors are fixed to a predetermined value of capacity, leaving only a small portion of the available degrees-of-freedom to be corrected. It is recognized that, on the one hand, due to the large number of different phased current-loops (hence the *a priori* large number of degrees-of-freedom), birdcage coils are extremely complicated in terms of design and manufacturing process. It would be therefore appreciated, that the trade-off compromising in the number of degrees-of-freedom limits the capability to tune and match the birdcage coil to the quality for which it has been originally designed. As opposed to the birdcage coil, RF resonator **10** enjoys the advantage of having a small number of current-loops, hence, the procedures of matching and tuning RF resonator **10** is substantially simplified over the respective procedures in prior art birdcage coils.

With respect to the slotted tube coils, in contrast to the birdcage coils, where the theoretical number of degrees-of-freedom is impractical, the available number of degrees-of-freedom in the slotted tube coils is too small to allow high quality imaging. Specifically, whereas slotted tube coils are equipped with tuning and matching circuitries, these coils fail to provide solutions to the problems associated with effects of field-sample interactions. A particular feature of RF resonator **10**, on the other hand, is the additional degree-of-freedom of balancing the RF field which is provided by electronic circuitry **22** in addition to the tuning and matching degrees-of-freedom. As demonstrated in the Examples section that follows, the ability to balance the RF

field to a symmetrical profile substantially minimizes inhomogeneities due to field-sample interactions.

The homogeneity of the RF field is achieved by a judicious selection of both the electrical setup connected to conductive elements 12 (*e.g.*, electronic circuitry 22), and the geometrical characteristics (*e. g.*, profile shape, dimensions, *etc.*) of conductive elements 12. According to a preferred embodiment of the present invention the additional conductive elements may be added to RF resonator 10, so as to further improve the magnetic field homogeneity. The effect of the additional conductive elements on the homogeneity of the magnetic field is demonstrated below in Figure 12d in the Examples section, where the additional conductive elements are designated 13. Preferably, a phase of the RF current flowing through additional conductive element 13 equals a phase of the RF current flowing through conductive elements 12.

The electrical setup and the geometrical characteristics depend on the number of conductive elements 12. Hence, in one embodiment in which four conductive elements are used (Figure 8b), the electrical setup and the geometry are preferably such that one pair of conductive elements is electrically and magnetically decoupled from the other pair. The geometrical shape of conductive elements 12 is not limited. Thus, the first curvature can be, for example, a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid or a curvature of an irregular surface. According to a preferred embodiment of the present invention conductive elements 12 may also have a second curvature along longitudinal axis 14, which second curvature is also not limited and can be, for example, any of the above curvatures. Both the first and the second curvatures may be either constant or variable curvature. For example, the first curvature may vary with an azimuthal angle and the second curvature may vary with an inclination angle.

According to the basic laws of electromagnetism, any coil which is designed for generating a magnetic field induces some boundary effects near its edges which are manifested through inhomogeneities in the magnetic field. Therefore, the longitudinal dimension of conductive elements 12 is preferably selected so as to minimize such inhomogeneities to occur on the imaged object. Specifically, the edges of RF resonator 10 are preferably designed sufficiently far from the object to be imaged.

The separation between conductive elements 12 is preferably selected according the application, so that RF resonator 10 surrounds the object which is to be

imaged. In one embodiment, the separation is such that conductive elements 12 effectively surround the imaged object.

RF resonator 10 may also be coupled to RF transmitter 24, via a transmission line 26. It is often desired to minimize energy losses between RF transmitter 24 and RF resonator 10. It is known that the transferred energy between two electronic elements is maximal if their impedances match. Thus, preferably, the impedance of RF resonator 10 is substantially the same as the internal resistance of RF transmitter 24. A typical value for the internal resistance of RF transmitter 24 is about 50 Ω .

With reference to Figure 8c, in another embodiment, the coupling between RF resonator 10 and RF transmitter 24 is via an RF antenna 27 (*e.g.*, another coil) rather than via RF transmission line 26. In this embodiment, RF resonator 10 is wireless and all its energy is transferred from RF transmitter 24 via mutual inductance of RF antenna 27 and RF resonator 10.

A well known phenomenon in the art of MRI, already discussed in the Background section above, is that the imaged object, once loaded into the resonator, alters many of its characteristics (*e. g.*, the impedance, the resonance frequencies and the RF field lines), as compared to the original characteristics obtained during the design of the resonator. Electronic circuitry 22 serves for tuning the resonance frequencies to their desired values, for matching the impedance of RF resonator 10 to the impedance of RF transmitter 24 and for balancing the RF magnetic field symmetry which is distorted by the imaged sample.

A detailed description of circuitry 22, according to preferred embodiments of the present invention, is provided herein, where the description of the tuning and matching precedes the description of the balancing.

Resonance tuning and impedance matching are well known in the art, and each independently may be done by more than one way, *e.g.*, via tunable capacitors, tunable inductors. In addition, the tuning and/or the matching may be done by varying mutual inductance between inductors (for example, mutual inductance between RF resonator 10 and RF transmitter 24 or mutual inductance between elements in circuitry 22 and RF transmitter 24). Still in addition, the tuning and/or the matching may be done by constructing an arrangement of transmission lines having predetermined impedance.

Thus, according to a preferred embodiment of the present invention, circuitry 22 comprises an arrangement of capacitors, tunable capacitors, inductors, tunable inductors and/or transmission lines, which have typical impedance.

5 The capacitors used in circuitry 22 may be of any kind presently known in the art, *e.g.*, regular capacitors, vacuum capacitors or other high power capacitors. Capacitors or tunable components which are expected to be developed during the life time of this patent are not excluded.

Attention is now made to the novel concept of balancing the RF magnetic field. The spatial shape of the electromagnetic radiation from conductive elements 12 within the volume-of-interest depends on the geometry of the volume-of-interest and on the 10 RF currents flowing through conductive elements 12 (and through additional conductive elements 13, in the embodiments in which elements 13 are used). For a given geometry, however, the spatial shape of the electromagnetic radiation in a vacuum depends exclusively on the RF currents.

15 Hence, according to a preferred embodiment of the present invention, circuitry 22 is configured and designed to control the RF currents through conductive elements 12 so that the generated magnetic field inside the volume-of-interest has a substantially symmetric profile. For example, in a preferred embodiment in which there are two opposite conductive elements having identical geometry, a symmetrical 20 profile may be ensured, by imposing a zero electric potential on a specific point of circuitry 22 so that anti parallel currents in the conducting elements are equal. Other potential configurations may also be used for providing a symmetrical magnetic RF field profile, within the volume-of-interest.

Thus, unlike, *e.g.*, the birdcage coil, where, even when an ideal homogenous 25 sample is used, no full compensation of the coil homogeneity is feasible once the tuning and matching capacitors are changed, electronic circuitry 22 has a particular feature of balancing the RF field to have a substantially symmetric profile thereby to considerably reduce sample effects. One ordinarily skilled in the art would appreciate that the balancing of the RF field may be achieved not only in cases of artificial 30 sample but rather on real objects which are to be imaged. Moreover, for an object having a mirror symmetry (such as, but not limited to, a human head), it is always possible to obtain a symmetric profile for the RF field, provided that the symmetry axis of the objects is parallel to longitudinal axis 18.

The balancing of the RF field may be done either during the manufacturing of RF resonator **10** (the so called "factory settings"), or while RF resonator is in medical use. Specifically, RF resonator **10** preferably comprise a balancing adjuster **23** electrically communicating with circuitry **22** so that while in operational mode, balancing adjuster **23** tunes the tunable components of circuitry **22** until the RF field has a substantially symmetrical profile with respect to a transverse axis (*i.e.*, perpendicular to longitudinal axis **14**).

It is to be understood, however, that although RF resonator **10** has the advantage that the resonance tuning, the impedance matching and the RF field balancing are controlled by the same circuitry (*e.g.*, circuitry **22**), other circuitries may also be employed for performing any combination of the above adjustments.

As stated, RF resonator **10** may include any number (larger than two) of conductive elements **12**. The selected number affects the characteristic of the produced magnetic field, in particular its homogenous area and its polarization. Thus, according to a preferred embodiment of the present invention additional conductive elements are used to further improve the magnetic field homogeneity. In this embodiment, the currents flowing in the additional elements are related to currents **16** by a predetermined functional relation. Predetermined functions which may be used for this purpose include, but are not limited to, a linear function, a polynomial function, an exponential function, a rational function, a power function or any combination thereof. For example, the currents flowing in the additional elements may be a predetermined fraction (*e.g.*, one half) of currents **16**.

For the purpose of magnetic resonance imaging, as well as for magnetic resonance analysis may be performed, many field polarization may be used, provided that the respective polarization may be mathematically expanded, such that at least one component of the expansion ensures a magnetic field which rotates about the direction of the main static magnetic field. For example, the polarization may be circular or linear, where the linear polarization is viewed as an equal weight sum of a left-hand circular polarization and a right-hand circular polarization. An RF resonator which generates a linearly polarized RF field is called a linear resonator, and an RF resonator which generates a circularly polarized RF field is called a quadrature resonator [C.-N. Chen *et al.*, "Quadrature Detection Coils - A Further Improvement in Sensitivity", *J. Magn. Reson.*, 54:324-327, 1983].

The present invention successfully addresses the issue of polarization of the magnetic field. Thus, according to a preferred embodiment of the present invention the number of conductive elements **12** is selected so that the RF field is linearly polarized. Hence in this embodiment RF resonator **10** is a linear resonator. The linearly polarized field is preferably produced by two conductive elements, *e. g.*, as shown in Figure 8a.

According to another preferred embodiment of the present invention the number of conductive elements **12** is selected so that the RF field is substantially circularly polarized. Hence in this embodiment RF resonator **10** is a quadrature resonator. The circularly polarized field is preferably generated by four conductive elements, *e. g.*, as shown in Figure 8b. In this embodiment, the four conductive elements are preferably arranged so that perpendicularity is maintained, as further detailed hereinunder.

The conductive elements may be of any known conductive material such as, but not limited to, gold, silver, copper, copper sheets. In one embodiment conductive elements **12** are made of a superconducting material. In this embodiment RF resonator **10** further comprises means for preserving conductive elements **12** at a sufficiently low temperature to maintain the superconductivity. Such temperatures may range between about 4.7 K and about 10 K and technologies allowing superconductivity in this contexts are described in R. S. Withers, *et al.*, "Thin-Film HTS Probe Coils for Magnetic Resonance Imaging" *SPLE Proc.*, Series 2156, High-T: Microwave Superconductors and Applications, 2427 Jan. 1994, Los Angeles, CA., 27-35, and R. D. Black, *et al.*, "A High Temperature Superconducting Receiver for Nuclear Magnetic Resonance Microscopy", *Science* 259: 793-95, 1993. However it is to be understood that other technologies, *e.g.*, of high temperature superconductivity, which will be developed during the lifetime of this patent are not excluded.

As further detailed hereinbelow, RF resonator **10** may be used, for example, in an MRI apparatus which includes, *inter alia*, one or more gradient coils used. Typically, once gradient coils are switched on, a rapidly growing electromagnetic field is generated, resulting in inductance of eddy currents in other surrounding conductors. According to the laws of electromagnetism, these eddy currents generate electromagnetic fields opposing the original field. Hence, according to a preferred embodiment of the present invention, conductive elements **12** are designed and

constructed to minimize eddy currents generated therein, thereby to allow the DC field generated by the gradient coils to penetrate through conductive elements 12 once the gradient coils are switched on. This may be done, for example, by constructing conductive elements 12 such that each conductive elements is characterized by the so called "RF shield structure". In other words, conductive elements 12 also serve as a low-pass filter transparent to a DC field, while being opaque to the RF field.

More specifically, conductive elements 12 may be manufactured as two conductive foils (*e.g.*, copper foils, or superconducting foil) having a dielectric material therebetween, thereby forming a double sided conductive surface. The formation of eddy currents may then be prevented by etching narrow gaps on each side of the double sided conductive surface such that no two gaps overlap. Thus, when the narrow gaps are filled with a dielectric material having the appropriate properties (*e.g.*, dielectric constant and thickness), the gaps, while being transparent to the DC gradient field, are still opaque to the RF currents. It is to be understood, however, that unlike the birdcage coil, where currents flowing through the legs of the birdcage coil are with different phases, the RF currents flowing in each one of conductive elements 12 are all in one phase.

The present invention successfully provides a method of designing an RF resonator for magnetic resonance analysis, for example RF resonator 10. The method comprises the following method steps which are illustrated in the flowchart of Figure 9.

Hence, in a first step, designated in Figure 9 by Block 32, at least two computationally defined surfaces are selected for engaging at least two conductive elements (*e. g.*, conductive elements 12). The surfaces have a first curvature along a direction perpendicular to a longitudinal axis, and may have a second curvature along the longitudinal axis. The number of surfaces (and therefore also the number of conductive elements) is preferably selected according to the desired polarization of the RF field, as further detailed hereinabove and exemplified in the Examples section that follows. The number of surfaces also dictates the number of eigenvectors (current-modes) which appear in the solution of the corresponding eigenvalue equation for the currents flowing through the conductive elements. Specifically, the number of surfaces equals the number of eigenvectors, thereby to the number of eigenvalues,

which, as already explained in the Background section hereinabove, are related to the resonance frequencies of the RF resonator.

Unlike birdcage coil, where the number of legs (therefore also the number of undesired resonance frequencies which are to be eliminated) is large, in the RF resonator of the present invention, the number of conductive element is preferably selected so as to minimize the overall number of current-modes. Thus, for small number of conductive elements, there are a small number of current-modes corresponding to a small number of resonance frequencies. Being sufficiently spaced apart in the frequency space, the desired mode may be easily selected, leaving the undesired modes to be substantially inactive.

In a second step of the method, designated by Block 34, a magnetic field is calculated within the surfaces. Unlike the design of prior art coils (*e. g.*, birdcage coils), the design of the magnetic field is completely decoupled from the design of the resonance characteristics of the resonator. Thus, in a third step, designated by Block 36 in Figure 9, the first and the second steps are iteratively repeated so as to provide optimize geometry which corresponds to a substantially homogenous magnetic field. Specifically, in each iterative step, any specific combination of curvature, length, separation and number of conductive elements may be tested to optimize the homogeneity of the magnetic field.

In a fourth step, designated by Block 38, means capable of providing predetermined resonance characteristics of the RF resonator, are selected based on the optimize geometry and the magnetic field which are already known from the third step. Preferably, frequency shifts which may occur due to the future existence of an imaged object within the RF coils are considered while the fourth step is executed. Still preferably, impedance differences which may be present between the RF resonator and the RF transmitter are considered in the forth step. Thus, the means which are selected preferably comprise an arrangement of tunable components which can be used for impedance matching. Further preferably, the profile of the RF field with respect to a transverse axis is considered in the fourth step. In other words, the means which are selected preferably designed to facilitate the above-mentioned process of balancing the RF field lines, so as to have a substantially symmetrical profile with respect to a transverse axis

It is to be understood that the execution of the fourth step is far simpler than an equivalent step in the design of, *e. g.*, a birdcage coil, due to the relatively small number of current-modes. Specifically, as further demonstrated in the Examples section that follows, it is sufficient to select a small number of tunable components in the design of the RF resonator, so that once the RF resonator is reduced to practice, these tunable components are used for tuning, matching and balancing the RF resonator. Although, the tuning, matching and balancing are, in principle, repeated iteratively, one would appreciate that as the number of tunable components is minimized the simplicity of finding an optimal solution is maximized.

The second step of the method may be executed in more than one way. In one embodiment, the second step is executed straightforwardly by solving the set of Maxwell's equations within the geometry selected in the first step, thereby to obtaining electromagnetic field lines.

In another embodiment, the second step is executed by a method known as the finite element method. The finite element method is described, for example, in a book by Jianming Jin, entitled "Electromagnetic Analysis and Design in Magnetic Resonance Imaging", published by CRC press LLC, the contents of which are hereby incorporated by reference. This embodiment is preferably used in cases in which the size of the RF resonator is smaller than the desired resonant wavelength. The basic principle of this method is to divide the space into a plurality of finite elements (*e.g.*, rectangular elements, triangular elements and the like) and to use these elements for solving the governing equations.

In an additional embodiment, the second step is executed by a method known as the moments analysis method, which is also described, *e. g.*, in the book of Jianming Jin (*ibid*). This embodiment is preferably used when the size of the RF resonator is comparable to the desired resonant wavelength. The basic principle of the moments analysis method is to formulate and solve an integral equation representing the fields, produced by currents flowing in the RF resonator, using a free-space Green's function.

The RF resonator, designed according to the above method steps, may be used, *e. g.*, in an MRI apparatus combining the RF resonator, a device for providing a static magnetic field and maybe also one or more gradient coils. It is known that when the RF field electromagnetically interacts with the static magnetic field device and/or with

the gradient coil(s) energy losses may occur, degrading the performances of the RF resonator. In addition, such electromagnetic interaction may shift the resonance frequency or even add more current-modes which are characterized by resonance frequencies which are close to the desired mode frequency, hence reduces the ability of the RF resonator to operate in a single, desired, resonance frequency.

Thus, according to a preferred embodiment of the present invention, the method further comprises a step of designing an RF shield for minimizing electromagnetic interactions between the RF resonator and the static magnetic field device and/or between the RF resonator and the gradient coil(s). This step is preferably executed prior to the second step and it is represented by Block 44 in Figure 9. RF shields are known in the art and their design is straightforward once the RF resonator configuration is known. One method of designing an RF shield is known as the method of images, and is found, *e. g.*, in an article by Jin J.M. *et al.*, entitled "A Simple Method to Incorporate the Effects of an RF Shield into RF Resonator Analysis for MRI Applications", published in *IEEE Trans. Biomed. Eng.*, 42:840-843, the contents of which are hereby incorporated by reference. Other methods are found in Ong KC, *et al.*, "Radiofrequency shielding of surface coils at 4.0T" *Magn. Reson. Imag.* 5:233-237, 1987; and in Alecci M, "Characterization and reduction of gradient-induced eddy currents in the RF shield of a TEM resonator", *Magn Res in Medicine* 48:404-407, 2002.

In the method of images one assumes that the field produced by currents induced on the RF shield is a mirror image of the field produced by the original currents. Thus, given the original currents, one calculates the total RF field produced both by the original and by the induced currents.

According to a preferred embodiment of the present invention the method further comprises a step of designing at least one end-cap to be positioned adjacent to at least one end of the RF resonator for minimizing magnetic field inhomogeneities along the longitudinal axis. This step is preferably executed prior to the second step and it is designated by Block 46 in Figure 9. End-caps are known in the art of magnetic resonance design and are used as "electromagnetic mirrors" which effectively increase the longitudinal dimension of the resonator. Thus, the end-cap minimizes boundary effects, hence reduces the field inhomogeneity, in particular near the edge where the end-cap is positioned.

According to an additional aspect of the present invention, there is provided an RF resonator for magnetic resonance analysis generally referred to herein as RF resonator **100**. Hence, RF resonator **100** comprises at least two conductive elements **12**, and at least one additional conductive element **13**. The principles and operations
5 of RF resonator **10** are similar to the principles and operations of RF resonator **10**, as further detailed hereinabove. Conductive elements **12** and additional conductive elements **13** of RF resonator **100** are best illustrated in Figure 12d of the Examples section hereinbelow.

Reference is now made to Figure 10, which is a block diagram illustrating an
10 MRI apparatus, generally referred to as apparatus **50**, according to an additional aspect of the present invention.

Hence, apparatus **50** comprises a device **51** for providing a static magnetic field. Device **51** may be, for example, a permanent magnet, an electromagnet, a superconductivity-based device and the like. It is expected that during the life of this
15 patent many relevant magnets and electromagnets will be developed and the scope of the phrase "device for providing a static magnetic field" is intended to embrace all such new technologies *a priori*. For example, device **51** may comprises at least one shim coil for further corrections of the homogeneity of the static field.

Apparatus **50** further comprises a processing unit **52**, an RF transmitter **54** and
20 an RF resonator **56**. The construction and operation of RF resonator **56** are similar to the construction and operation of RF resonator **10** or RF resonator **100** as further detailed hereinabove. RF resonator **56** may also have supplementary features with respect to RF resonator **10**, for example, RF resonator **56** may be a multi frequency RF resonator designed for obtaining signals from two or more nuclei, each having a
25 different gyromagnetic ratio (*e.g.*, ¹H and ³¹P). Additionally, RF resonator **56** may include conductive elements having a predetermined capacitance distribution, that reduce the electric field created by RF resonator **56**, for minimizing effects of the imaged object on the magnetic field and for minimizing corona discharge from conductive elements **12**.

30 According to a preferred embodiment of the present invention apparatus **50** may further comprise any number of gradient coils **58** for providing a predetermined gradient of static magnetic field. Any gradient coil known in the art of MRI may be used. As stated, electromagnetic interactions between the RF field and device **51**

and/or between the RF field and the gradient coil(s) 58 result in undesired energy losses. Thus, apparatus 50 further comprises an RF shield 60, configured and designed for minimizing those electromagnetic interactions, as further detailed hereinabove. Apparatus 50 may also comprise one or more end-caps 62, positioned
5 adjacent to one or more ends of RF resonator 56 for minimizing magnetic field inhomogeneities.

According to a preferred embodiment of the present invention apparatus 50 further comprises decoupling means for electrically decoupling RF resonator 54 from one or more of gradient coils 58. This may be done, for example, by an enveloping
10 external device having high value capacitors located thereon. Such a device is known as a DC block capacitors.

According to a preferred embodiment of the present invention apparatus 50 may include more than one RF resonator 56. For example, RF resonator 56 and one or more additional resonators may be arranged to form an RF resonator array, such as,
15 but not limited to, a phased array. Preferably, all the RF resonators are electromagnetically decoupled from each other to avoid the undesired effect of interactions between the generated RF fields.

Reference is now made to Figure 11, which is a flowchart of a method for magnetic resonance analysis of an object. The method comprises the following
20 method steps in which in a first step, represented by Block 72, a static magnetic field is applied on the subject in a direction of a longitudinal axis. In a second step, represented by Block 74, substantially homogenous RF magnetic field is applied on the subject, using, *e.g.*, RF resonator 10, 100 or 56, in a direction perpendicular to the longitudinal axis. In a third step, represented by Block 76, nuclear magnetic resonance
25 parameters are acquired from the object, so as to analyze the object.

The MRI apparatus, the method of magnetic resonance analysis and any apparatus, device and/or system which employs the RF resonator described above may be employed on many objects which are to be imaged and/or analyzed. These include, but are not limited to, an animal (*e. g.*, a human being), an organ of an animal, a tissue,
30 a swollen elastomer and a food material. In addition, the object may be at least one type of molecules present (*e.g.*, dissolved, dispersed or emulsed) in the solvent.

Additional objects, advantages, and novel features of the present invention will become apparent to one ordinarily skilled in the art upon examination of the following examples, which are not intended to be limiting. Additionally, each of the various embodiments and aspects of the present invention as delineated hereinabove and as claimed in the claims section below finds experimental support in the following examples.

EXAMPLES

Reference is now made to the following examples, which, together with the above descriptions, illustrate the invention in a non limiting fashion.

EXAMPLE 1

A Linear RF Resonator

A prototype of a linear resonator having two conductive elements was designed and built for imaging a rat head in an 8.46 T static magnetic field generated by a AVANCE 360 WB spectrometer, purchased from Bruker Medizintechnik GmbH, D-76275 Ettlingen, Germany.

Description of the Prototype

The ratio between the resonator size and the resonance wavelength was selected to be about 0.02, hence, any variation of the RF phase was negligibly small (the so called "near-field approximation"). The mathematical reason for the smallness of variation is that the variation is proportional to the sine of the distance from the conductive element, hence, for distances which are sufficiently smaller than the wavelength, the sine (and the variation) approaches zero. Specifically, the distance from the conductive surfaces to the center of the imaged sample was 1.5 cm and the resonant wavelength was 83.2 cm. For such configuration the change in the wave amplitude over the sample is less than one percent. A non conductive gap of 2.5 mm between the conductive elements and the volume-of-interest was designed. The dimensions of the gap were selected for avoiding strong field effects near the conductive elements on the one hand, and for maintaining a sufficiently effective the pulse length on the other hand. The RF resonator was designed so as to be enveloped by a cylindrical shell of a gradient unit, 53 mm in diameter.

RF Field Simulation

The Laplace equation governing the static electric component of the field inside the RF resonator volume was solved by a finite difference method, utilizing SimIon 6.0 software.

For simplicity, infinitely long legs were assumed, thereby neglecting boundary effects. the RF resonator has antiparallel mirror symmetry. Thus, in accordance with the uniqueness theorem of the Laplace equation, one half of the RF resonator was simulated and the other half was mirrored by a straight plane of zero field intensity.

The cylindrical container of the RF resonator served as an effective RF shield, hence simulated by a zero-potential half-circle.

Reference is now made to Figures 12a-c, illustrating the calculated equipotential lines of the field, for various profiles of conductive elements 12. One ordinarily skilled in the art would appreciate that the equipotential lines also represent the pattern of the magnetic field for this simulation. Figures 12a and 12b show profiles which generate inhomogenous field. Figure 12c shows an optimal profile generating a central area of equally spaced and substantially parallel equipotential lines corresponding to a homogenous field. In this configuration a planar angle of 100° was measured from the center of the RF resonator to the edges of each conductive element.

Figures 12d-e show simulations results in which additional conductive elements 13, carrying a current which is one half of the current flowing in conductive elements 12, are used in addition to conductive elements 12. Figure 12d shows equipotential lines and Figure 12e shows field lines where each field line represents an intensity step of 9 %. It can be seen that additional conductive elements 13 serve for controlling the field homogeneity.

Figure 12f shows results of electric field simulations of the prototype resonator. The simulations were executed using Matlab™ 6 software package, using a $120 \times 120 = 14400$ elements matrix. Figures 12e is a contour plot of the electric field gradient, which represents the RF magnetic field.

A circular area-of-interest located in the central area of the prototype resonator was defined, which area-of-interest included 1130 out of the 14400 elements, and is equivalent to a circle 22 mm in diameter. The simulations were directed at calculating statistical characteristics of the area-of-interest. As the simulations are inherently

symmetrical, it is sufficient to simulate one half of the transverse plane. As further demonstrated hereinafter, the same area-of-interest was defined for experimental measurements, where the resolution is about 44 % higher (128×256 pixels).

The uniformity of the RF magnetic field was defined as:

$$\text{Uniformity} = 1 - \frac{\sigma}{\bar{I}}, \quad (\text{EQ. 1})$$

where σ is the intensity standard-deviation and \bar{I} is the average intensity in the analyzed area. The uniformity was found to be 96% for the above described area of interest.

AC Simulations

The resonance characteristics were designed using the lumped elements method, employing Micro-Cap 6 software for the AC analysis. Possible deviation between the simulation process and the physical RF resonator were considered *a-priori* by introducing three tunable capacitors into the circuit.

Figure 13 illustrates the simulated circuit. **L1** and **L2** are inductors representing conductive elements 12. **C1**, ..., **C5** are capacitors, **R1**, **R2**, **R3** and **R9** are parasite resistances **V1** is an RF transmitter and **K1** is the mutual inductance between **L1**, **L2** and was set to be 0.3. The main current loop defined by elements **L1**, **C1**, **C2** and **L2** envelopes the sample to be imaged. Capacitors **C3** and **C4** were used for balancing between the left portion and the right portion of the circuit, while capacitor **C5** was used for matching the circuit to RF transmitter **V1**. In the simulation, the current flowing through capacitors **C3** and **C4** was inductively decoupled from the main current-loop. In other words, the magnetic field that is generated by the current through capacitors **C3** and **C4** was not interacting with the sample. Resistor **R9** was introduced for representing the sample's resistance. The simulations results are provided hereinbelow with reference to points-of-interest, designated in Figure 13 by 1, 2 and 6.

Figure 14 show the simulated potential difference between points 1 and 2, and the potential at point 6. The RF resonator has only two current modes, referred to herein as a common-mode and an anti-mode, corresponding to resonance frequencies of 310 MHz and 360 Mhz, respectively. The desired mode frequency was selected to be the 360 Mhz mode. Both resonance frequencies are shown as voltage peaks in Figure 14. The frequency separation between the two modes is governed by the

relative values of capacitors C1, C2, C3 and C4, and by the mutual inductance between conductive elements 12.

As further demonstrated below, the physical circuit can be matched, balanced and tuned to the desired mode, using three tunable capacitors (C1, C3 and C4) and one fixed-value capacitor (C2), configured so as to eliminate the voltage drop on resistor R9, *i. e.*, imposing a zero voltage at a point designated "A" in Figure 13. In practice, while imaging a sample, the zero voltage at "A" minimizes transient effects on the circuit realized by muscles movements (breath, blood pulsation, *etc.*) of the sample, and ensures that the two halves of the circuit are balanced.

Prototype Buildup

Materials and Methods

Reference is now made to Figure 15, showing the experimental setup. The prototype included two conductive elements 12, capacitors 82, an upper metal washer plate 84, a lower metal washer plate 94, insulators 86, an external cylinder 88 and an internal cylinder 90. The terminals conductive elements 12 are designated 92.

The experimental setup was build from brass sheet metal processed by machining. The external container was 53 mm in diameter, conductive elements 12 were 1 mm thick and 25 mm height and their edges were rounded. Conductive elements 12 situated along an arc, 30 mm in diameter.

All circuitry connections and capacitors were located above conductive elements 12. Metal washer plate 84 was used to screen all capacitors and connectors from the imaging volume, so as to minimize the field contribution from sources other than the conductive elements 12, and in particular the abovementioned current-loops of C3, and C4. The tunable capacitors were selected of low self resistance compared to the sample's resistive load. Thus, only small amount of power was dissipated through the C3 and C4 current-loops.

Both conductive elements 12 were connected by welding to a common ground. Terminals 92 protrude into the capacitors level through slots in upper metal washer plate 84. Conductive elements 12 were electroplated with 10 μm of silver, in order to increase conductivity within the skin depth range. The Silver layer was electroplated with a protective 1 μm layer of Gold. Most other parts of the probe were made of TEFLON™, such as the internal pipe that prevents direct contact between the sample and the conductive elements 12. Ertalon 4.6 nuts were used to fix the tunable

capacitors in place. The circuit uses 3 tunable capacitors NMAP40HV purchased from Voltronics, range from 1.5 to 40 pF (C1, C3 and C4 of Figure 13) and one chip capacitor of 2.2 pF purchased from ATM (C2 of Figure 13). Once assembled, the circuit was tuned, matched and balanced at the resonant frequency of 360.13 MHz.

5 Balance was achieved by imposing a zero voltage at "A".

The resonant spectrum of the experimental setup was checked by means of a spectrum analyzer and found to match the predictions of the AC simulations (see Figure 14). Identification of the undesired common mode was performed by touching "A" with a metal instrument, thus affecting only the undesired mode while having no effect on the desired mode. When the desired mode was set to 360.13 MHz, the undesired common mode's frequency was 236.5 MHz, showing higher mutual inductance between conductive elements 12 than the original simulation estimates.

For the purpose of obtaining a full mapping of the RF magnetic field intensity, a sufficiently large phantom was selected. The phantom was a container filled with 0.075 M saline. The phantom length was more than 5 cm, which is much longer than the effective imaging volume of the RF resonator.

An unloaded of $Q \approx 70$ was estimated for the experimental setup using a small loop antenna. The extent of the sample effect on the circuit was measured by comparing the resonant frequency of the circuit with and without the phantom. As the phantom occupies the entire RF resonator void, it bears much greater resistance and capacitance than the sample which is to be imaged. The difference between the two frequencies was 0.8 MHz, which is very small once considering the circuit Q value.

Imaging Tests

A spin echo pulse sequence was chosen to for the excitation, so as to maximize the dependence of the signal intensity on the RF magnetic field. One ordinarily skilled in the art would appreciate that, as opposed, for example to a 90° pulse, such pulse substantially over estimates this dependence. Thus, the results presented herein are to be considered as bounding the quality of the prototype from below.

The uniformity of the RF magnetic field was defined as in Equation 1 hereinabove.

Figures 16a-b show the RF magnetic field profile through an axial slice, and the one-dimensional cross sections along orthogonal directions. The yellow circle represents an area-of-interest, 22 mm in diameter, to which statistical characteristics

were calculated. As opposed to the simulations of the area-of-interest, the image is more vulnerable to non-symmetrical effects. Figure 16a shows plots of the measured magnetic field along two one-dimensional profiles, which are indicated as two perpendicular lines with respective colors within the area-of-interest. The calculated

5 uniformity, in accordance to Equation 1, for the area-of-interest was 95 %, in agreement with the uniformity calculated in the simulations. Figure 16b shows the calculated statistical characteristics and the histogram for the area-of-interest. Generally, the RF magnetic field pattern is highly homogenous in the central areas of the coil.

10 Figures 17a-b show the RF magnetic field profile through a coronal slice. A yellow rectangle, 14×21 mm, represents an area-of-interest, to which statistical characteristics were calculated. Figure 17a shows plots of the measured magnetic field along two one-dimensional profiles, which are indicated as two perpendicular lines with respective colors within the area-of-interest. Figure 17b shows the calculated

15 statistical characteristics and the histogram for the rectangular area-of-interest. The profile along the transverse direction is substantially homogenous in the central imaging area. The profile along the longitudinal direction shows a homogenous area in the central area of the RF resonator, with a remnant region of boundary effects near the edges.

20 Although boundary effects were detected, the calculated uniformity within the area-of-interest was 96 %. The reader is advised to compare the observed boundary effects with other RF coils, *e. g.*, the 16 legs birdcage shown in Figure 4.20 (page 172) of the book of Jianming J. (*ibid*). The boundary effects in the birdcage are more pronounced, even though, in principle, the dimensions of the birdcage favor much less

25 boundary effects due to the lower diameter-to-height ratio, as compared to the present prototype.

Figures 18a-b show the RF magnetic field profile through a sagittal slice, within the same area-of-interest as in Figures 17a-b. Figure 17a shows plots of the measured magnetic field along two one-dimensional profiles, which are indicated as two

30 perpendicular lines with respective colors within the area-of-interest. Figure 17b shows the calculated statistical characteristics and the histogram for the rectangular area-of-interest. Similarly to the coronal slice, the profile along the transverse direction is substantially homogenous in the central imaging area, while a remnant

region of boundary effects is observed along the longitudinal direction near the edges. The uniformity for the above rectangle of interest was 90 %. The difference between the sagittal (Figures 18a-b) and the coronal (Figures 17a-b) slices uniformity is explained by the mirror symmetry of the prototype.

Figures 19a-d show axial spin echo slices in a rat head, using an 8.46 T wide bore magnet and utilizing fat suppression pulses. Each slice thickness was 1 mm. The quality of the image is vivid.

EXAMPLE 2

A Quadrature RF Resonator

Following is a description of a quadrature RF resonator designed as two decoupled linear RF resonators.

Reference is now made to Figure 20 illustrating a top view of the quadrature RF resonator of this example. The quadrature resonator of this example includes four conductive elements arranged as two pairs, designated **12** and **12a**. Pair **12** and pair **12a** are positioned so that the respective symmetry axes are perpendicular to each other. Antiparallel currents **16** are driven through pair **12** and pair **12a**, where, according to the common convention, current which is outgoing downwards (into the plane of Figure 20) is designated by the cross symbol and current which is incoming upwards is designated by the dot symbol. Currents **16** are driven by a split phase RF source, so that the voltage on pair **12** is shifted by 90° with respect to the voltage on pair **12a**.

Currents **16** generate magnetic field in and outside the volume surrounded by the conductive elements. The characteristics of the magnetic field generated by pair **12** on the surface of pair **12a** may be better understood by considering two points, designated **G** and **F**, located on opposite sides of one conductive element of pair **12a**, which point are symmetrical with respect to the pair **12**. The magnetic field at **G** and **F** is identical in amplitude and opposite in sign, due to the opposite direction of the currents near each point. One ordinarily skilled in the art would appreciate that similar consideration apply for each two symmetrical located pair of points along one conductive element of pair **12a**. Thus, the magnetic field on the surface of each conductive element of pair **12a** is antisymmetric with respect to a symmetry axis of the surface.

Reference is now made to Figure 21 which shows the electrical currents induced onto the surfaces of pair 12a, due to changes in magnetic flux therethrough. At each point of points F and G, the induced current is opposite in direction to that of the conductive element of pair 12 which is close to it. Therefore, the effect of pair 12 on pair 12a is the induction of current loops by on the surface pair 12a.

However, although current loops do exist on pair 12a, the total net current induce by pair 12 on pair 12a, is zero, thereby ensuring that pair 12a is decoupled from pair 12. A skilled artisan would appreciate that such decoupling may be achieved, for different geometries of the surfaces, provided that each conductive element is symmetrical, and that two pairs are perpendicularly positioned (*e. g.*, as in Figure 20).

The driven currents flowing through pair 12a generate an induced magnetic field directed opposite to the direction of the magnetic field generated by pair 12. Hence, even though no electric/magnetic conjugation exists between the pairs, pair 12a changes the field pattern generated by pair 12. Specifically the use of pair 12a in addition to pair 12, under a phase shift condition which is supplied by the split phase RF source, ensures that the RF magnetic field is substantially circularly polarized.

The magnetic field pattern of the quadrature RF resonator of the present example was simulated utilizing the same technique that was used for the determination of the linear RF resonator of Example 1. In the simulations, the contribution of pair 12a to the magnetic field was calculated by representing the conductive elements of pair 12a as surfaces of zero magnetic field. The justification for this representation is related to the observation that due to its short wavelength, the RF field cannot percolates through a conductive element whose width is larger than many skin depths.

As stated the simulation is conducted using the near-field approximation, hence, pair 12a is represented by zero-potential surfaces, while the pair 12, is represented by a finite potential surface. The voltage configuration of the quadrature RF resonator is shown in Figure 22.

Reference is now made to Figures 23a-b, showing the simulation results. Figure 23a shows the calculated electric potential and Figure 23b shows the calculated electric field. As can be seen, a considerable homogenous area with a substantially zero gradient was observed in the central region of the quadrature RF resonator.

It is appreciated that certain features of the invention, which are, for clarity, described in the context of separate embodiments, may also be provided in combination in a single embodiment. Conversely, various features of the invention, which are, for brevity, described in the context of a single embodiment, may also be provided separately or in any suitable subcombination.

Although the invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, it is intended to embrace all such alternatives, modifications and variations that fall within the spirit and broad scope of the appended claims. All publications, patents and patent applications mentioned in this specification are herein incorporated in their entirety by reference into the specification, to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated herein by reference. In addition, citation or identification of any reference in this application shall not be construed as an admission that such reference is available as prior art to the present invention.

WHAT IS CLAIMED IS:

1. A radiofrequency (RF) resonator for magnetic resonance analysis, the RF resonator comprising:

(a) at least two conductive elements, each having a first curvature along a direction perpendicular to a longitudinal axis, said at least two conductive elements being spaced along said longitudinal axis, so that when an RF current flows within said at least two conductive elements in a direction of said longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to said longitudinal axis, is produced in a volume defined between said at least two conductive elements; and

(b) an electronic circuitry designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with said electronic circuitry, and for balancing said RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to said longitudinal axis.

2. The RF resonator of claim 1, further comprising a balancing adjuster electrically communicating with said electronic circuitry, said balancing adjuster is constructed and designed for controlling said electronic circuitry while the RF resonator is in medical use.

3. The RF resonator of claim 1, further comprising at least one additional conductive element positioned so as to further minimize inhomogeneity of said magnetic field.

4. The RF resonator of claim 3, wherein a phase of an RF current flowing through said at least one additional conductive element equals a phase of said RF currents flowing through said at least two conductive elements.

5. The RF resonator of claim 3, wherein an RF current flowing through said at least one additional conductive element depends on said RF currents flowing through said at least two conductive elements, through a predetermined function.

6. The RF resonator of claim 5, wherein said predetermined function is selected from the group consisting of a linear function, a polynomial function, an exponential function, a rational function, a power function and any combination thereof.

7. The RF resonator of claim 3, wherein an RF current flowing through said at least one additional conductive element is a predetermined fraction of said RF currents flowing through said at least two conductive elements.

8. The RF resonator of claim 7, wherein said predetermined fraction is one half.

9. The RF resonator of claim 1, wherein said electronic circuitry comprises means for varying mutual capacitance.

10. The RF resonator of claim 1, wherein said electronic circuitry comprises means for varying mutual inductance.

11. The RF resonator of claim 10, wherein said mutual inductance is defined between the RF resonator and said RF transmitter.

12. The RF resonator of claim 10, wherein said mutual inductance is defined between said electronic circuitry and said RF transmitter.

13. The RF resonator of claim 1, wherein said electronic circuitry comprises an arrangement of capacitors, inductors, tunable capacitors and tunable inductors.

14. The RF resonator of claim 13, wherein said capacitors and said tunable capacitors are high power capacitors.

15. The RF resonator of claim 14, wherein said high power capacitors are vacuum capacitors.

16. The RF resonator of claim 1, wherein a longitudinal dimension of said at least two conductive elements is selected so as to minimize magnetic field inhomogeneities along said longitudinal axis.

17. The RF resonator of claim 1, wherein a separation between said at least two conductive elements is selected so as to surround an object to be imaged.

18. The RF resonator of claim 17, wherein said object is a mammal.

19. The RF resonator of claim 17, wherein said object is an organ of a mammal.

20. The RF resonator of claim 17, wherein said object is a tissue.

21. The RF resonator of claim 17, wherein said object is a swollen elastomer.

22. The RF resonator of claim 17, wherein said object is a food material.

23. The RF resonator of claim 17, wherein said object is liquid.

24. The RF resonator of claim 17, wherein said object is at least one type of molecules present in a solvent.

25. The RF resonator of claim 24, wherein said at least one type of molecules present in said solvent is selected from the group consisting of molecule

dissolved in said solvent, a molecule dispersed in said solvent and a molecule emulsed in said solvent.

26. The RF resonator of claim 1, wherein said first curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

27. The RF resonator of claim 1, wherein at least one of said at least two conductive elements further has a second curvature along a direction parallel to said longitudinal axis.

28. The RF resonator of claim 27, wherein said first curvature and said second curvature are each independently constant curvatures.

29. The RF resonator of claim 27, wherein said first curvature and said second curvature are each independently variable curvatures.

30. The RF resonator of claim 27, wherein said second curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

31. The RF resonator of claim 1, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is linearly polarized.

32. The RF resonator of claim 1, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is substantially circularly polarized.

33. The RF resonator of claim 1, wherein said at least two conductive elements are two conductive elements.

34. The RF resonator of claim 1, wherein said at least two conductive elements are four conductive elements.

35. The RF resonator of claim 34, wherein a first pair of said four conductive elements is electrically decoupled from a second pair of said four conductive elements.

36. The RF resonator of claim 34, wherein a first pair of said four conductive elements is magnetically decoupled from a second pair of said four conductive elements.

37. The RF resonator of claim 34, wherein a first pair of said four conductive elements is electromagnetically decoupled from a second pair of said four conductive elements.

38. The RF resonator of claim 34, wherein a first pair and a second pair of said four conductive elements are positioned so that a transverse axis of said first pair is substantially perpendicular to a transverse axis of said second pair.

39. The RF resonator of claim 1, wherein said at least two conductive elements are made of a superconducting material.

40. The RF resonator of claim 39, further comprising means for preserving said at least two conductive elements at a sufficiently low temperature.

41. The RF resonator of claim 1, wherein said at least two conductive elements are designed and constructed to minimize eddy currents generated therein.

42. The RF resonator of claim 1, wherein said at least two conductive elements are characterized by an RF shield structure, for substantially blocking RF radiation while transmitting low frequency radiation.

43. A method of designing a radiofrequency (RF) resonator for magnetic resonance analysis, the method comprising:

(a) selecting at least two surfaces to engage at least two conductive elements, said at least two surfaces having a first curvature along a direction perpendicular to a longitudinal axis, thereby defining a geometry between said at least two surfaces;

(b) using said geometry for calculating a magnetic field within said geometry;

(c) iteratively repeating said steps (a) and (b) so as to provide optimized geometry corresponding to a substantially homogenous magnetic field; and

(d) using said optimized geometry and said substantially homogenous magnetic field for designing an electronic circuitry for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with said electronic circuitry, and for balancing said RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to said longitudinal axis.

44. The method of claim 43, wherein said matching is by varying mutual capacitance.

45. The method of claim 43, wherein said matching is by varying mutual inductance.

46. The method of claim 45, wherein said mutual inductance is defined between the RF resonator and said RF transmitter.

47. The method of claim 45, wherein said mutual inductance is defined between said electronic circuitry and said RF transmitter.

48. The method of claim 43, wherein a longitudinal dimension of said at least two conductive elements is selected so as to minimize magnetic field inhomogeneities along said longitudinal axis.

49. The method of claim 43, wherein said calculating said magnetic field within said geometry is by solving Maxwell's equations.

50. The method of claim 43, wherein said calculating said magnetic field within said geometry is by finite element method.

51. The method of claim 43, wherein said calculating said magnetic field within said geometry is by moments analysis method.

52. The method of claim 43, wherein a separation between said at least two conductive elements is selected so as to surround an object to be imaged.

53. The method of claim 52, wherein said object is a mammal.

54. The method of claim 52, wherein said object is an organ of a mammal.

55. The method of claim 52, wherein said object is a tissue.

56. The method of claim 52, wherein said object is a swollen elastomer.

57. The method of claim 52, wherein said object is a food material.

58. The method of claim 52, wherein said object is liquid.

59. The method of claim 52, wherein said object is at least one type of molecules present in the solvent.

60. The method of claim 59, wherein said at least one type of molecules present in said solvent is selected from the group consisting of molecule dissolved in

said solvent, a molecule dispersed in said solvent and a molecule emulsed in said solvent.

61. The method of claim 43, further comprising designing an RF shield for minimizing electromagnetic interactions between the RF resonator and at least one gradient coil and/or between the RF resonator and a device for providing a static magnetic field.

62. The method of claim 61, wherein said designing an RF shield is by the method of images.

63. The method of claim 43, further comprising designing at least one end-cap to be positioned adjacent to at least one end of the RF resonator for minimizing magnetic field inhomogeneities along said longitudinal axis.

64. The method of claim 43, wherein said first curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

65. The method of claim 43, wherein at least one of said at least two surfaces further has a second curvature along a direction parallel to said longitudinal axis.

66. The method of claim 65, wherein said first curvature and said second curvature are each independently constant curvatures.

67. The method of claim 65, wherein said first curvature and said second curvature are each independently variable curvatures.

68. The method of claim 65, wherein said second curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

69. The method of claim 43, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is linearly polarized.

70. The method of claim 43, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is substantially circularly polarized.

71. The method of claim 43, wherein said at least two conductive elements are two conductive elements.

72. The method of claim 43, wherein said at least two conductive elements are four conductive elements.

73. The method of claim 72, further comprising decoupling a first pair of said four conductive elements from a second pair of said four conductive elements.

74. The method of claim 72, further comprising magnetically decoupling a first pair of said four conductive elements from a second pair of said four conductive elements.

75. The method of claim 72, further comprising electrically decoupling a first pair of said four conductive elements from a second pair of said four conductive elements.

76. The method of claim 72, further comprising electromagnetically decoupling a first pair of said four conductive elements from a second pair of said four conductive elements.

77. The method of claim 72, wherein a first pair and a second pair of said four conductive elements are positioned so that a transverse axis of said first pair is substantially perpendicular to a transverse axis of said second pair.

78. The method of claim 43, further comprising designing at least one additional conductive element, so as to further minimize inhomogeneity of said magnetic field.

79. The method of claim 78, wherein a phase of an RF current flowing through said at least one additional conductive element equals a phase of currents flowing through said at least two conductive elements.

80. The method of claim 78, wherein an RF current flowing through said at least one additional conductive element depends on currents flowing through said at least two conductive elements, through a predetermined function.

81. The method of claim 80, wherein said predetermined function is selected from the group consisting of a linear function, a polynomial function, an exponential function, a rational function, a power function and any combination thereof.

82. The method of claim 78, wherein an RF current flowing through said at least one additional conductive element is a predetermined fraction of currents flowing through said at least two conductive elements.

83. The method of claim 82, wherein said predetermined fraction is one half.

84. The method of claim 43, wherein said at least two conductive elements are designed and constructed to minimize eddy currents generated therein.

85. The method of claim 43, wherein said at least two conductive elements are characterized by an RF shield structure for substantially blocking RF radiation while transmitting low frequency radiation.

86. An apparatus for magnetic resonance analysis, the apparatus comprising:

- (a) a device for providing a static magnetic field;
- (b) a processing unit; and
- (c) a radiofrequency (RF) resonator coupled to an RF transmitter, said RF

resonator comprising:

at least two conductive elements, each having a first curvature along a direction perpendicular to a longitudinal axis, said at least two conductive elements being spaced along said longitudinal axis, so that when an RF current flows within said at least two conductive elements in a direction of said longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to said longitudinal axis, is produced in a volume defined between said at least two conductive elements; and

an electronic circuitry designed and configured for providing predetermined resonance characteristics of said RF resonator, for matching an impedance of said RF resonator to an impedance of said RF transmitter, and for balancing said RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to said longitudinal axis.

87. The apparatus of claim 86, wherein said RF resonator further comprising a balancing adjuster electrically communicating with said electronic circuitry, said balancing adjuster is constructed and designed for controlling said electronic circuitry while resonator is in medical use.

88. The apparatus of claim 86, wherein said RF resonator further comprising at least one additional conductive element positioned so as to further minimize inhomogeneity of said magnetic field.

89. The apparatus of claim 88, wherein a phase of an RF current flowing through said at least one additional conductive element equals a phase of said RF currents flowing through said at least two conductive elements.

90. The apparatus of claim 88, wherein an RF current flowing through said at least one additional conductive element depends on said RF currents flowing through said at least two conductive elements, through a predetermined function.

91. The apparatus of claim 90, wherein said predetermined function is selected from the group consisting of a linear function, a polynomial function, an exponential function, a rational function, a power function and any combination thereof.

92. The apparatus of claim 88, wherein an RF current flowing through said at least one additional conductive element is a predetermined fraction of said RF currents flowing through said at least two conductive elements.

93. The apparatus of claim 92, wherein said predetermined fraction is one half.

94. The apparatus of claim 86, wherein said device for providing said static magnetic field comprises at least one shim coil.

95. The apparatus of claim 86, further comprising at least one gradient coil.

96. The apparatus of claim 95, further comprising an RF shield constructed and designed for minimizing electromagnetic interactions between said at least one gradient coil and said device for providing a static magnetic field.

97. The apparatus of claim 86, further comprising at least one end-cap positioned adjacent to at least one end of said RF resonator, said at least one end-cap constructed and designed for minimizing magnetic field inhomogeneities along said longitudinal axis.

98. The apparatus of claim 86, wherein said RF resonator is coupled to said RF transmitter via a transmission line.

99. The apparatus of claim 86, wherein said RF resonator is coupled to said RF transmitter via an RF antenna.

100. The apparatus of claim 98, wherein said electronic circuitry comprises means for varying mutual capacitance.

101. The apparatus of claim 98, wherein said electronic circuitry comprises means for varying mutual inductance.

102. The apparatus of claim 101, wherein said mutual inductance is defined between said RF resonator and said RF transmitter.

103. The apparatus of claim 101, wherein said mutual inductance is defined between said electronic circuitry and said RF transmitter.

104. The apparatus of claim 86, wherein said electronic circuitry comprises an arrangement of capacitors, inductors, tunable capacitors and tunable inductors.

105. The apparatus of claim 104, wherein said capacitors and said tunable capacitors are high power capacitors.

106. The apparatus of claim 105, wherein said high power capacitors are vacuum capacitors.

107. The apparatus of claim 86, wherein a longitudinal dimension of said at least two conductive elements is selected so as to minimize magnetic field inhomogeneities along said longitudinal axis.

108. The apparatus of claim 86, wherein a separation between said at least two conductive elements is selected so as to surround an object to be imaged.

109. The apparatus of claim 108, wherein said object is a mammal.

110. The apparatus of claim 108, wherein said object is an organ of a mammal.

111. The apparatus of claim 108, wherein said object is a tissue.
112. The apparatus of claim 108, wherein said object is a swollen elastomer.
113. The apparatus of claim 108, wherein said object is a food material.
114. The apparatus of claim 108, wherein said object is liquid.
115. The apparatus of claim 108, wherein said object is at least one type of molecules present in the solvent.
116. The apparatus of claim 115, wherein said at least one type of molecules present in said solvent is selected from the group consisting of molecule dissolved in said solvent, a molecule dispersed in said solvent and a molecule emulsed in said solvent.
117. The apparatus of claim 86, wherein said first curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.
118. The apparatus of claim 86, wherein at least one of said at least two conductive elements further has a second curvature along a direction parallel to said longitudinal axis.
119. The apparatus of claim 118, wherein said first curvature and said second curvature are each independently constant curvatures.
120. The apparatus of claim 118, wherein said first curvature and said second curvature are each independently variable curvatures.
121. The apparatus of claim 118, wherein said second curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a

curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

122. The apparatus of claim 86, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is linearly polarized.

123. The apparatus of claim 86, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is substantially circularly polarized.

124. The apparatus of claim 86, wherein said at least two conductive elements are two conductive elements.

125. The apparatus of claim 86, wherein said at least two conductive elements are four conductive elements.

126. The apparatus of claim 125, wherein a first pair of said four conductive elements is electrically decoupled from a second pair of said four conductive elements.

127. The apparatus of claim 125, wherein a first pair of said four conductive elements is magnetically decoupled from a second pair of said four conductive elements.

128. The apparatus of claim 125, wherein a first pair of said four conductive elements is electrically decoupled from a second pair of said four conductive elements.

129. The apparatus of claim 125, wherein a first pair of said four conductive elements is electromagnetically decoupled from a second pair of said four conductive elements.

130. The apparatus of claim 125, wherein a first pair and a second pair of said four conductive elements are positioned so that a transverse axis of said first pair is substantially perpendicular to a transverse axis of said second pair.

131. The apparatus of claim 86, wherein said at least two conductive elements are made of a superconducting material.

132. The apparatus of claim 131, further comprising means for preserving said at least two conductive elements at a sufficiently low temperature.

133. The apparatus of claim 131, further comprising at least one additional RF resonator arranged with said RF resonator to form an RF resonator array.

134. The apparatus of claim 133, further comprising decoupling means for decoupling said RF resonator from said at least one additional RF resonator.

135. The apparatus of claim 95, further comprising decoupling means for decoupling said RF resonator from said at least one gradient coil.

136. The apparatus of claim 135, wherein said decoupling means comprise DC block capacitors.

137. The apparatus of claim 133, wherein said array is a phased array.

138. The apparatus of claim 131, wherein said RF resonator is a multi frequency RF resonator.

139. The apparatus of claim 131, wherein each of said at least two conductive elements has a predetermined capacitance distribution for minimizing effects of an object to be imaged on said magnetic field and for minimizing corona discharge from said at least two conductive elements.

140. The apparatus of claim 86, wherein said at least two conductive elements are designed and constructed to minimize eddy currents generated therein.

141. The apparatus of claim 86, wherein said at least two conductive elements are characterized by an RF shield structure for substantially blocking RF radiation while transmitting low frequency radiation.

142. A method for Magnetic Resonance analysis of an object, the method comprising:

applying a static magnetic field on the subject in a direction of a longitudinal axis;

applying a substantially homogenous radiofrequency (RF) magnetic field on the subject, in a direction perpendicular to said longitudinal axis; and

acquiring nuclear magnetic resonance parameters from the object, thereby analyzing the object;

wherein said applying said substantially homogenous RF magnetic field is by a RF resonator coupled to an RF transmitter, said RF resonator comprising:

at least two conductive elements, each having a first curvature along a direction perpendicular to said longitudinal axis, said at least two conductive elements being spaced along said longitudinal axis, so that when an RF current flows within said at least two conductive elements in a direction of said longitudinal axis, said substantially homogenous RF magnetic field, is produced in a volume defined between said at least two conductive elements; and

an electronic circuitry designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with said electronic circuitry, and for balancing said RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to said longitudinal axis.

143. The method of claim 1, further comprising balancing said RF magnetic field using a balancing adjuster electrically communicating with said electronic circuitry.

144. The method of claim 142, wherein said RF resonator further comprising at least one additional conductive element positioned so as to further minimize inhomogeneity of said magnetic field.

145. The method of claim 144, wherein a phase of an RF current flowing through said at least one additional conductive element equals a phase of said RF current flowing through said at least two conductive elements.

146. The method of claim 144, wherein an RF current flowing through said at least one additional conductive element depends on said RF currents flowing through said at least two conductive elements, through a predetermined function.

147. The method of claim 146, wherein said predetermined function is selected from the group consisting of a linear function, a polynomial function, an exponential function, a rational function, a power function and any combination thereof.

148. The method of claim 144, wherein an RF current flowing through said at least one additional conductive element is a predetermined fraction of said RF currents flowing through said at least two conductive elements.

149. The method of claim 148, wherein said predetermined fraction is one half.

150. The method of claim 142, further comprising applying at least one gradient pulse on the object.

151. The method of claim 142, wherein said RF resonator is coupled to said RF transmitter via a transmission line.

152. The method of claim 142, wherein said RF resonator is coupled to said RF transmitter via an RF antenna.

153. The method of claim 142, wherein said electronic circuitry comprises means for varying mutual capacitance.

154. The method of claim 142, wherein said electronic circuitry comprises means for varying mutual inductance.

155. The method of claim 153, wherein said mutual inductance is defined between said RF resonator and said RF transmitter.

156. The method of claim 153, wherein said mutual inductance is defined between said electronic circuitry and said RF transmitter.

157. The method of claim 142, wherein said electronic circuitry comprises an arrangement of capacitors, inductors, tunable capacitors and tunable inductors.

158. The method of claim 157, wherein said capacitors and said tunable capacitors are high power capacitors.

159. The method of claim 158, wherein said high power capacitors are vacuum capacitors.

160. The method of claim 142, wherein a longitudinal dimension of said at least two conductive elements is selected so as to minimize magnetic field inhomogeneities along said longitudinal axis.

161. The method of claim 142, wherein a separation between said at least two conductive elements is selected so as to surround the object.

162. The method of claim 142, wherein the object is a mammal.

163. The method of claim 142, wherein the object is an organ of a mammal.

164. The method of claim 142, wherein the object is a tissue.

165. The method of claim 142, wherein the object is a swollen elastomer.
166. The method of claim 142, wherein the object is a food material.
167. The method of claim 142, wherein said first curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.
168. The method of claim 142, wherein at least one of said at least two conductive elements further has a second curvature along a direction parallel to said longitudinal axis.
169. The method of claim 168, wherein said first curvature and said second curvature are each independently constant curvatures.
170. The method of claim 168, wherein said first curvature and said second curvature are each independently variable curvatures.
171. The method of claim 168, wherein said second curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.
172. The method of claim 142, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is linearly polarized.
173. The method of claim 142, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is substantially circularly polarized.
174. The method of claim 142, wherein said at least two conductive elements are two conductive elements.

175. The method of claim 142, wherein said at least two conductive elements are four conductive elements.

176. The method of claim 175, wherein a first pair of said four conductive elements is electrically decoupled from a second pair of said four conductive elements.

177. The method of claim 175, wherein a first pair of said four conductive elements is magnetically decoupled from a second pair of said four conductive elements.

178. The method of claim 175, wherein a first pair of said four conductive elements is electrically decoupled from a second pair of said four conductive elements.

179. The method of claim 175, wherein a first pair of said four conductive elements is electromagnetically decoupled from a second pair of said four conductive elements.

180. The method of claim 175, wherein a first pair and a second pair of said four conductive elements are positioned so that a transverse axis of said first pair is substantially perpendicular to a transverse axis of said second pair.

181. The method of claim 142, wherein said at least two conductive elements are made of a superconducting material.

182. The method of claim 181, further comprising preserving said at least two conductive elements at a sufficiently low temperature.

183. The method of claim 181, wherein said applying said substantially homogenous RF magnetic field is by at least one additional RF resonator.

184. The method of claim 181, wherein said at least one additional RF resonator is arranged with said RF resonator to form an RF resonator array.

185. The method of claim 183, further comprising electrically decoupling said RF resonator from said at least one additional RF resonator.

186. The method of claim 183, further comprising electromagnetically decoupling said RF resonator from said at least one additional RF resonator.

187. The method of claim 183, wherein said array is a phased array.

188. The method of claim 181, wherein said RF resonator is a multi frequency RF resonator.

189. The method of claim 181, wherein each of said at least two conductive elements has a predetermined capacitance distribution for minimizing effects of the object on said magnetic field and for minimizing corona discharge from said at least two conductive elements.

190. The method of claim 142, wherein said at least two conductive elements are designed and constructed to minimize eddy currents generated therein.

191. The method of claim 142, wherein said at least two conductive elements are characterized by an RF shield structure for substantially blocking RF radiation while transmitting low frequency radiation.

192. A radiofrequency (RF) resonator for magnetic resonance analysis, the RF resonator comprising:

(a) at least two conductive elements, each having a first curvature along a direction perpendicular to a longitudinal axis, said at least two conductive elements being spaced along said longitudinal axis, so that when an RF current flows within said at least two conductive elements in a direction of said longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to said longitudinal axis, is produced in a volume defined between said at least two conductive elements; and

(b) at least one additional conductive element, electrically communicating with said at least two conductive elements in a manner such that a phase of an RF current flowing through said at least one additional conductive element equals a phase of at least one of said RF currents flowing through said at least two conductive elements.

193. The RF resonator of claim 192, further comprising an electronic circuitry designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with said electronic circuitry, and for balancing said RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to said longitudinal axis.

194. The RF resonator of claim 193, further comprising a balancing adjuster electrically communicating with said electronic circuitry, said balancing adjuster is constructed and designed for controlling said electronic circuitry while the RF resonator is in medical use.

195. The RF resonator of claim 192, wherein an RF current flowing through said at least one additional conductive element depends on said RF currents flowing through said at least two conductive elements, through a predetermined function.

196. The RF resonator of claim 195, wherein said predetermined function is selected from the group consisting of a linear function, a polynomial function, an exponential function, a rational function, a power function and any combination thereof.

197. The RF resonator of claim 192, wherein an RF current flowing through said at least one additional conductive element is a predetermined fraction of said RF currents flowing through said at least two conductive elements.

198. The RF resonator of claim 197, wherein said predetermined fraction is one half.

199. The RF resonator of claim 193, wherein said electronic circuitry comprises means for varying mutual capacitance.

200. The RF resonator of claim 193, wherein said electronic circuitry comprises means for varying mutual inductance.

201. The RF resonator of claim 200, wherein said mutual inductance is defined between the RF resonator and said RF transmitter.

202. The RF resonator of claim 200, wherein said mutual inductance is defined between said electronic circuitry and said RF transmitter.

203. The RF resonator of claim 193, wherein said electronic circuitry comprises an arrangement of capacitors, inductors, tunable capacitors and tunable inductors.

204. The RF resonator of claim 203, wherein said capacitors and said tunable capacitors are high power capacitors.

205. The RF resonator of claim 204, wherein said high power capacitors are vacuum capacitors.

206. The RF resonator of claim 192, wherein a longitudinal dimension of said at least two conductive elements is selected so as to minimize magnetic field inhomogeneities along said longitudinal axis.

207. The RF resonator of claim 192, wherein a separation between said at least two conductive elements is selected so as to surround an object to be imaged.

208. The RF resonator of claim 207, wherein said object is a mammal.

209. The RF resonator of claim 207, wherein said object is an organ of a mammal.

210. The RF resonator of claim 207, wherein said object is a tissue.
211. The RF resonator of claim 207, wherein said object is a swollen elastomer.
212. The RF resonator of claim 207, wherein said object is a food material.
213. The RF resonator of claim 207, wherein said object is liquid.
214. The RF resonator of claim 207, wherein said object is at least one type of molecules present in a solvent.
215. The RF resonator of claim 214, wherein said at least one type of molecules present in said solvent is selected from the group consisting of molecule dissolved in said solvent, a molecule dispersed in said solvent and a molecule emulsed in said solvent.
216. The RF resonator of claim 192, wherein said first curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.
217. The RF resonator of claim 192, wherein at least one of said at least two conductive elements further has a second curvature along a direction parallel to said longitudinal axis.
218. The RF resonator of claim 217, wherein said first curvature and said second curvature are each independently constant curvatures.
219. The RF resonator of claim 217, wherein said first curvature and said second curvature are each independently variable curvatures.

220. The RF resonator of claim 217, wherein said second curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

221. The RF resonator of claim 192, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is linearly polarized.

222. The RF resonator of claim 192, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is substantially circularly polarized.

223. The RF resonator of claim 192, wherein said at least two conductive elements are two conductive elements.

224. The RF resonator of claim 192, wherein said at least two conductive elements are four conductive elements.

225. The RF resonator of claim 224, wherein a first pair of said four conductive elements is electrically decoupled from a second pair of said four conductive elements.

226. The RF resonator of claim 224, wherein a first pair of said four conductive elements is magnetically decoupled from a second pair of said four conductive elements.

227. The RF resonator of claim 224, wherein a first pair of said four conductive elements is electromagnetically decoupled from a second pair of said four conductive elements.

228. The RF resonator of claim 224, wherein a first pair and a second pair of said four conductive elements are positioned so that a transverse axis of said first pair is substantially perpendicular to a transverse axis of said second pair.

229. The RF resonator of claim 192, wherein said at least two conductive elements are made of a superconducting material.

230. The RF resonator of claim 229, further comprising means for preserving said at least two conductive elements at a sufficiently low temperature.

231. An apparatus for magnetic resonance analysis, the apparatus comprising:

- (a) a device for providing a static magnetic field;
- (b) a processing unit; and
- (c) a radiofrequency (RF) resonator coupled to an RF transmitter, said RF resonator comprising:

at least two conductive elements, each having a first curvature along a direction perpendicular to a longitudinal axis, said at least two conductive elements being spaced along said longitudinal axis, so that when an RF current flows within said at least two conductive elements in a direction of said longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to said longitudinal axis, is produced in a volume defined between said at least two conductive elements; and

at least one additional conductive element, electrically communicating with said at least two conductive elements in a manner such that a phase of an RF current flowing through said at least one additional conductive element equals a phase of at least one of said RF currents flowing through said at least two conductive elements.

232. The apparatus of claim 231, wherein said RF resonator further comprising an electronic circuitry designed and configured for providing predetermined resonance characteristics of said RF resonator, for matching an impedance of said RF resonator to an impedance of said RF transmitter, and for balancing said RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to said longitudinal axis.

233. The apparatus of claim 232, wherein said RF resonator further comprising a balancing adjuster electrically communicating with said electronic circuitry, said balancing adjuster is constructed and designed for controlling said electronic circuitry while said RF resonator is in medical use.

234. The apparatus of claim 231, wherein an RF current flowing through said at least one additional conductive element depends on said RF currents flowing through said at least two conductive elements, through a predetermined function.

235. The apparatus of claim 234, wherein said predetermined function is selected from the group consisting of a linear function, a polynomial function, an exponential function, a rational function, a power function and any combination thereof.

236. The apparatus of claim 231, wherein an RF current flowing through said at least one additional conductive element is a predetermined fraction of said RF currents flowing through said at least two conductive elements.

237. The apparatus of claim 236, wherein said predetermined fraction is one half.

238. The apparatus of claim 231, wherein said device for providing said static magnetic field comprises at least one shim coil.

239. The apparatus of claim 231, further comprising at least one gradient coil.

240. The apparatus of claim 239, further comprising an RF shield constructed and designed for minimizing electromagnetic interactions between said at least one gradient coil and said device for providing a static magnetic field.

241. The apparatus of claim 231, further comprising at least one end-cap positioned adjacent to at least one end of said RF resonator, said at least one end-cap

constructed and designed for minimizing magnetic field inhomogeneities along said longitudinal axis.

242. The apparatus of claim 232, wherein said RF resonator is coupled to said RF transmitter via a transmission line.

243. The apparatus of claim 232, wherein said RF resonator is coupled to said RF transmitter via an RF antenna.

244. The apparatus of claim 232, wherein said electronic circuitry comprises means for varying mutual capacitance.

245. The apparatus of claim 232, wherein said electronic circuitry comprises means for varying mutual inductance.

246. The apparatus of claim 245, wherein said mutual inductance is defined between said RF resonator and said RF transmitter.

247. The apparatus of claim 245, wherein said mutual inductance is defined between said electronic circuitry and said RF transmitter.

248. The apparatus of claim 232, wherein said electronic circuitry comprises an arrangement of capacitors, inductors, tunable capacitors and tunable inductors.

249. The apparatus of claim 248, wherein said capacitors and said tunable capacitors are high power capacitors.

250. The apparatus of claim 249, wherein said high power capacitors are vacuum capacitors.

251. The apparatus of claim 231, wherein a longitudinal dimension of said at least two conductive elements is selected so as to minimize magnetic field inhomogeneities along said longitudinal axis.

252. The apparatus of claim 231, wherein a separation between said at least two conductive elements is selected so as to surround an object to be imaged.

253. The apparatus of claim 252, wherein said object is a mammal.

254. The apparatus of claim 252, wherein said object is an organ of a mammal.

255. The apparatus of claim 252, wherein said object is a tissue.

256. The apparatus of claim 252, wherein said object is a swollen elastomer.

257. The apparatus of claim 252, wherein said object is a food material.

258. The apparatus of claim 252, wherein said object is liquid.

259. The apparatus of claim 252, wherein said object is at least one type of molecules present in the solvent.

260. The apparatus of claim 259, wherein said at least one type of molecules present in said solvent is selected from the group consisting of molecule dissolved in said solvent, a molecule dispersed in said solvent and a molecule emulsed in said solvent.

261. The apparatus of claim 231, wherein said first curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

262. The apparatus of claim 231, wherein at least one of said at least two conductive elements further has a second curvature along a direction parallel to said longitudinal axis.

263. The apparatus of claim 262, wherein said first curvature and said second curvature are each independently constant curvatures.

264. The apparatus of claim 262, wherein said first curvature and said second curvature are each independently variable curvatures.

265. The apparatus of claim 262, wherein said second curvature is selected from the group consisting of a curvature of cylinder, a curvature of an ellipsoid, a curvature of a hyperboloid, a curvature of a paraboloid and a curvature of an irregular surface.

266. The apparatus of claim 231, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is linearly polarized.

267. The apparatus of claim 231, wherein a number of said at least two conductive elements is selected so that said substantially homogenous RF magnetic field is substantially circularly polarized.

268. The apparatus of claim 231, wherein said at least two conductive elements are two conductive elements.

269. The apparatus of claim 231, wherein said at least two conductive elements are four conductive elements.

270. The apparatus of claim 269, wherein a first pair of said four conductive elements is electrically decoupled from a second pair of said four conductive elements.

271. The apparatus of claim 269, wherein a first pair of said four conductive elements is magnetically decoupled from a second pair of said four conductive elements.

272. The apparatus of claim 269, wherein a first pair of said four conductive elements is electrically decoupled from a second pair of said four conductive elements.

273. The apparatus of claim 269, wherein a first pair of said four conductive elements is electromagnetically decoupled from a second pair of said four conductive elements.

274. The apparatus of claim 269, wherein a first pair and a second pair of said four conductive elements are positioned so that a transverse axis of said first pair is substantially perpendicular to a transverse axis of said second pair.

275. The apparatus of claim 231, wherein said at least two conductive elements are made of a superconducting material.

276. The apparatus of claim 275, further comprising means for preserving said at least two conductive elements at a sufficiently low temperature.

277. The apparatus of claim 275, further comprising at least one additional RF resonator arranged with said RF resonator to form an RF resonator array.

278. The apparatus of claim 277, further comprising decoupling means for decoupling said RF resonator from said at least one additional RF resonator.

279. The apparatus of claim 239, further comprising decoupling means for decoupling said RF resonator from said at least one gradient coil.

280. The apparatus of claim 279, wherein said decoupling means comprise DC block capacitors.

281. The apparatus of claim 277, wherein said array is a phased array.

282. The apparatus of claim 275, wherein said RF resonator is a multi frequency RF resonator.

283. The apparatus of claim 275, wherein each of said at least two conductive elements has a predetermined capacitance distribution for minimizing effects of an object to be imaged on said magnetic field and for minimizing corona discharge from said at least two conductive elements.

284. The apparatus of claim 231, wherein said at least two conductive elements are designed and constructed to minimize eddy currents generated therein.

285. The apparatus of claim 231, wherein said at least two conductive elements are characterized by an RF shield structure for substantially blocking RF radiation while transmitting low frequency radiation.

ABSTRACT

A radiofrequency (RF) resonator for magnetic resonance analysis, the RF resonator comprising: (a) at least two conductive elements, each having a first curvature along a direction perpendicular to a longitudinal axis, the at least two conductive elements being spaced along the longitudinal axis, so that when an RF current flows within the at least two conductive elements in a direction of the longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to the longitudinal axis, is produced in a volume defined between the at least two conductive elements. The RF resonator further comprises (b) an electronic circuitry designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with the electronic circuitry, and for balancing the RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to the longitudinal axis.

1/23

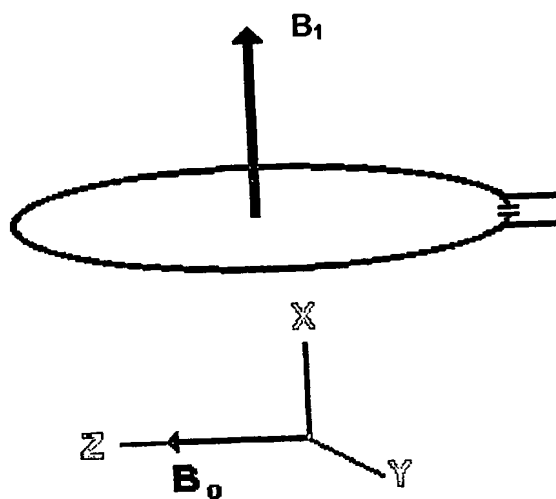


Fig. 1

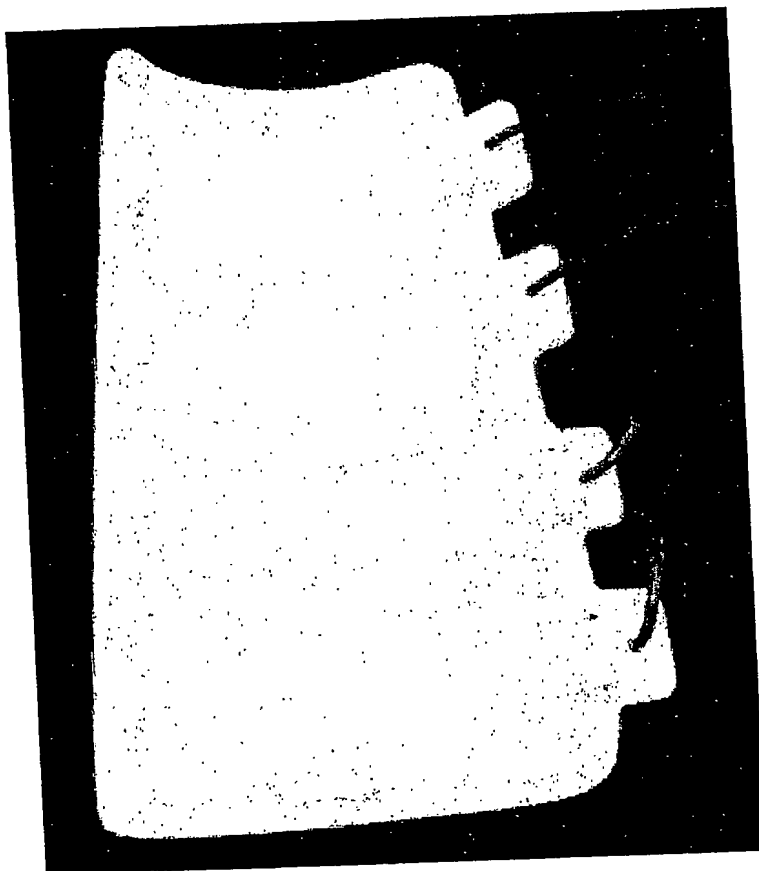


Fig. 2

2/23

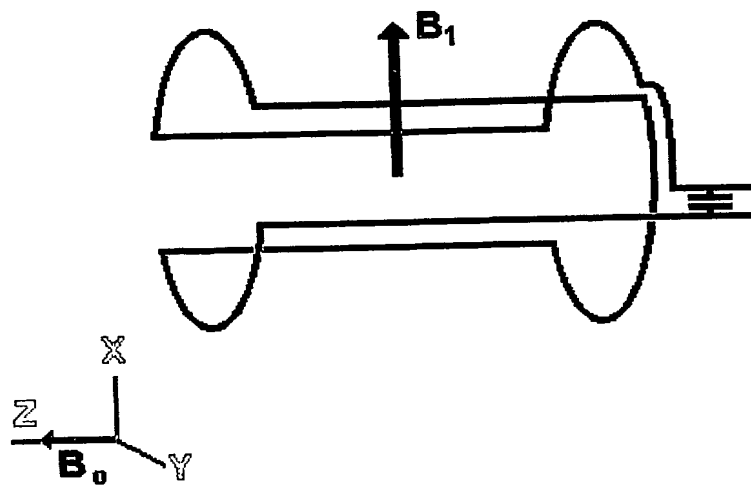


Fig. 3

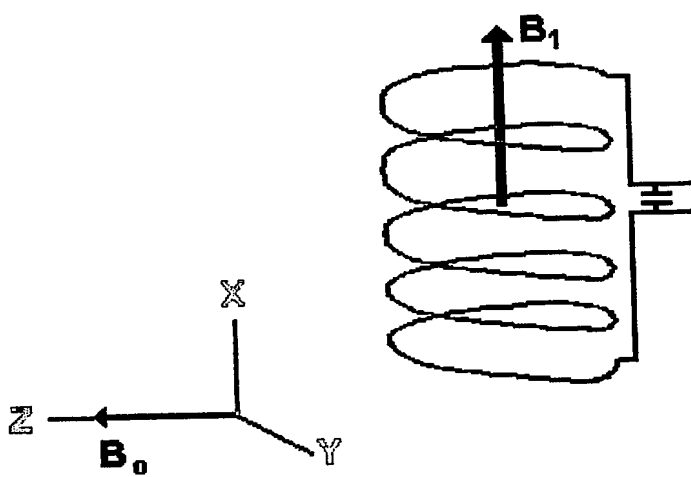


Fig. 4

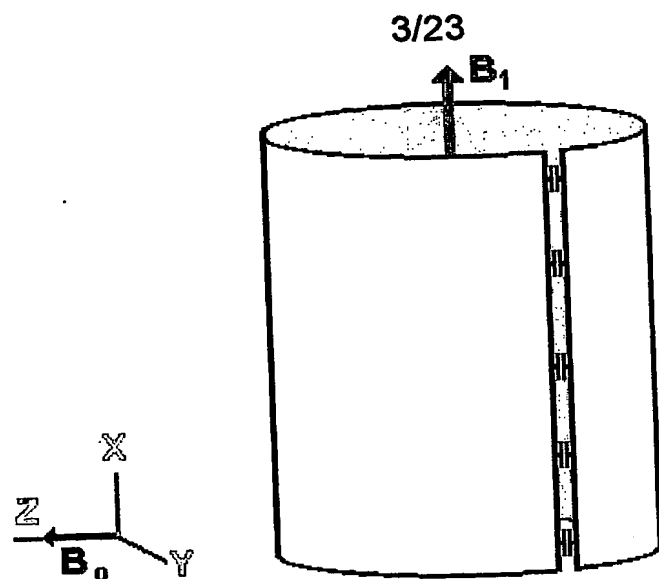


Fig. 5

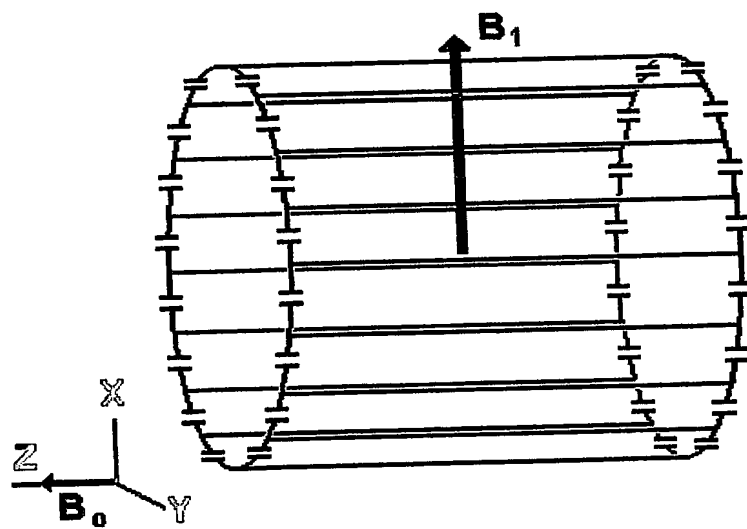


Fig. 6

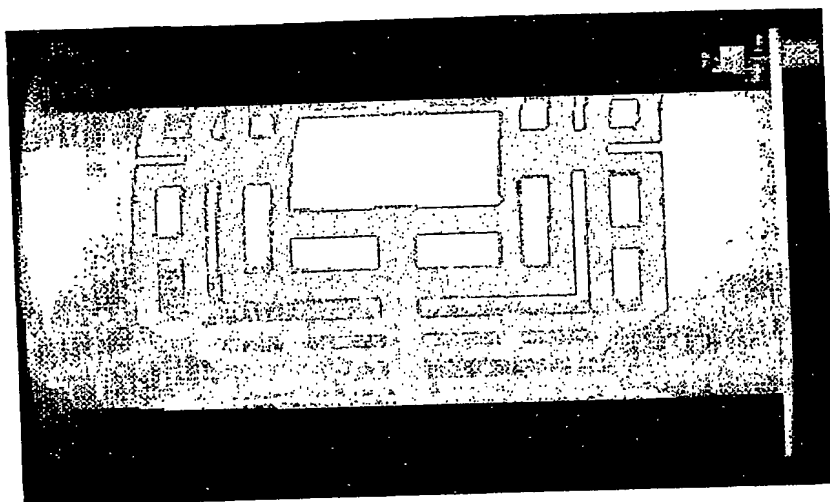


Fig. 7

6/23

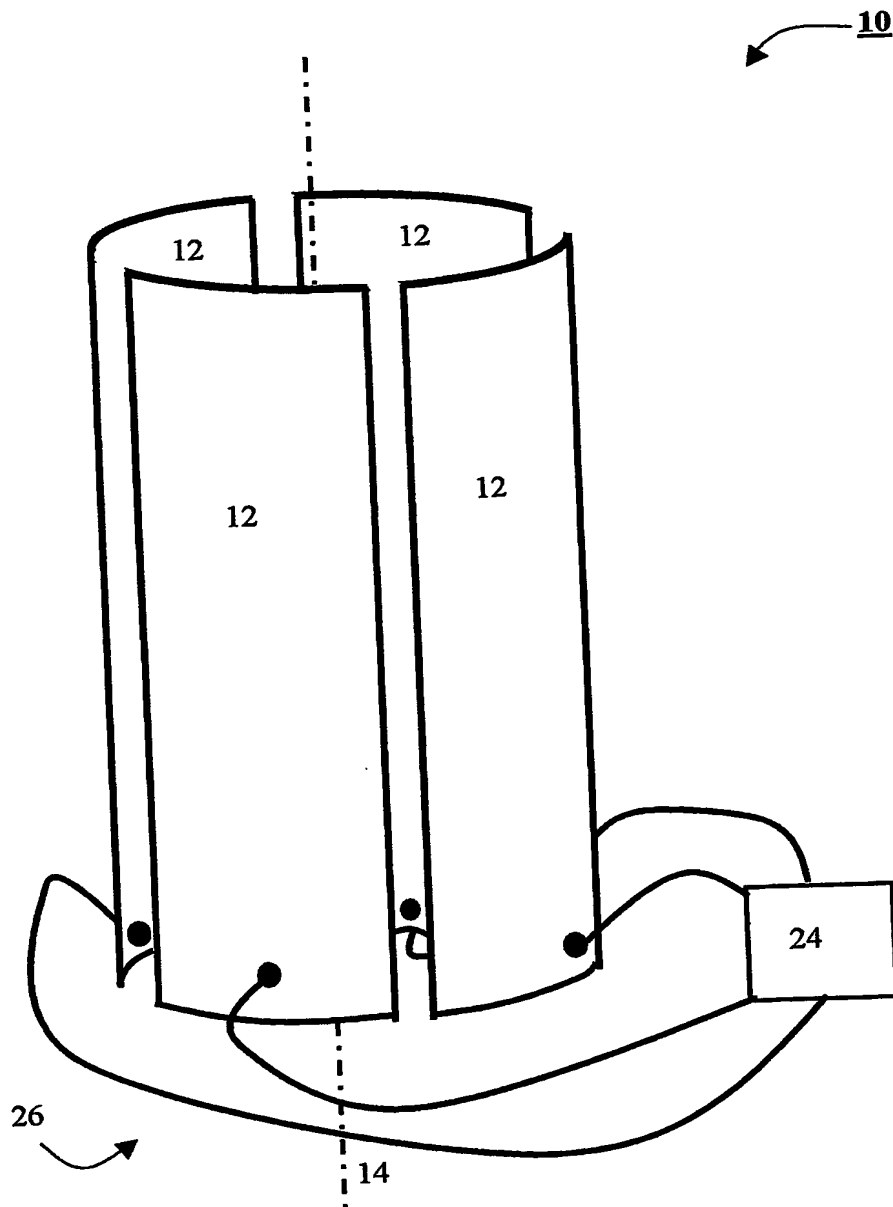


Fig. 8b

7/23

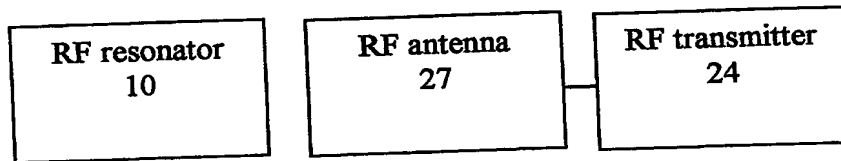


Fig. 8c

8/23

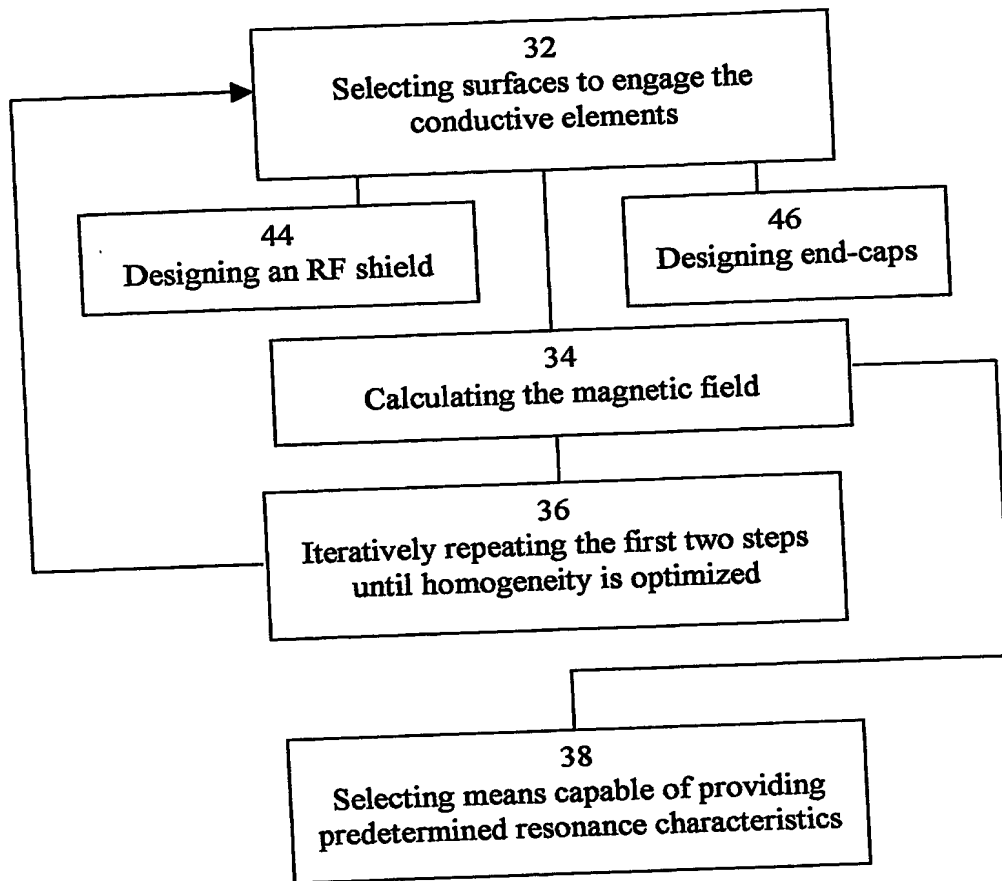


Fig. 9

9/23

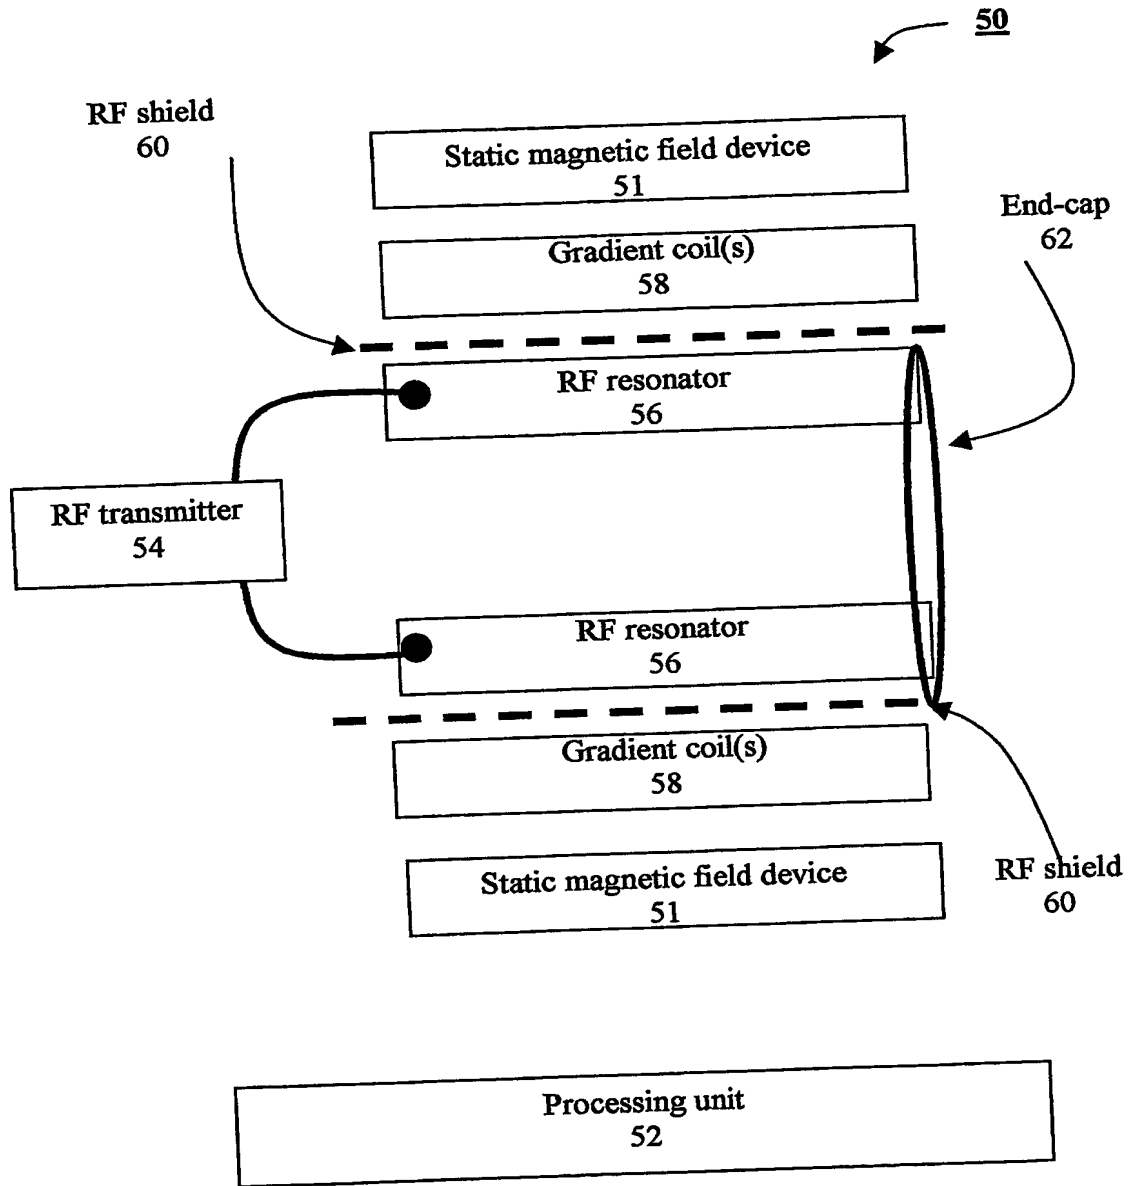


Fig. 10

10/23

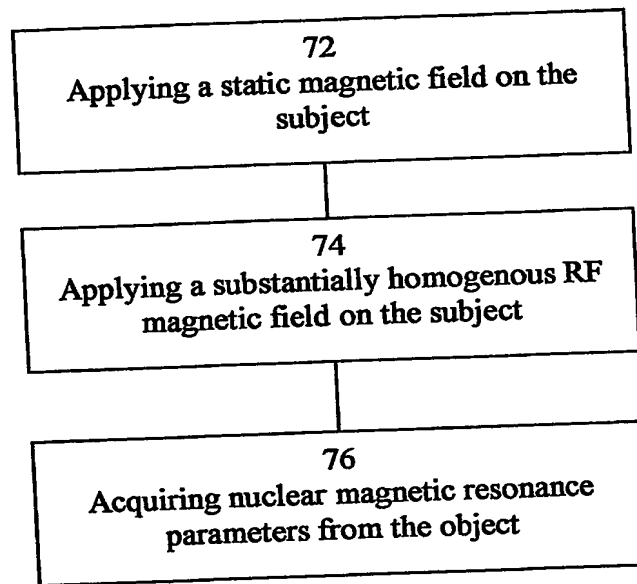


Fig. 11

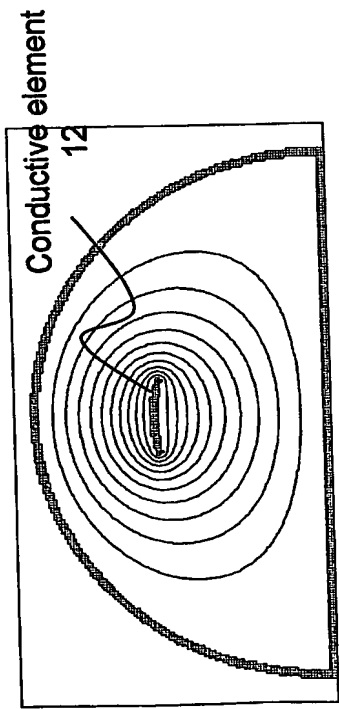


Fig. 12a

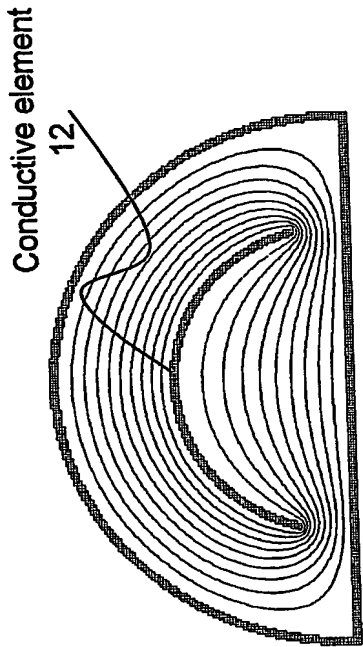


Fig. 12b


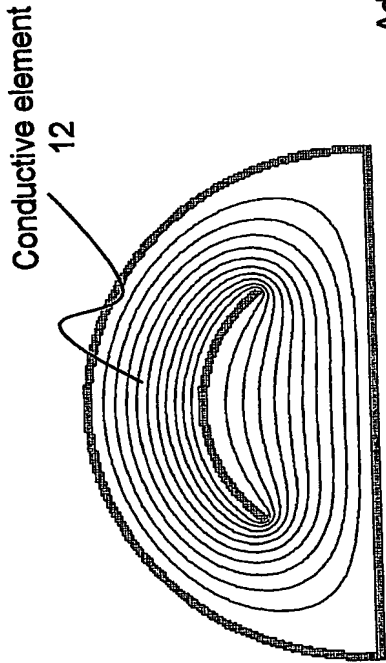


Fig. 12c

11/23



100

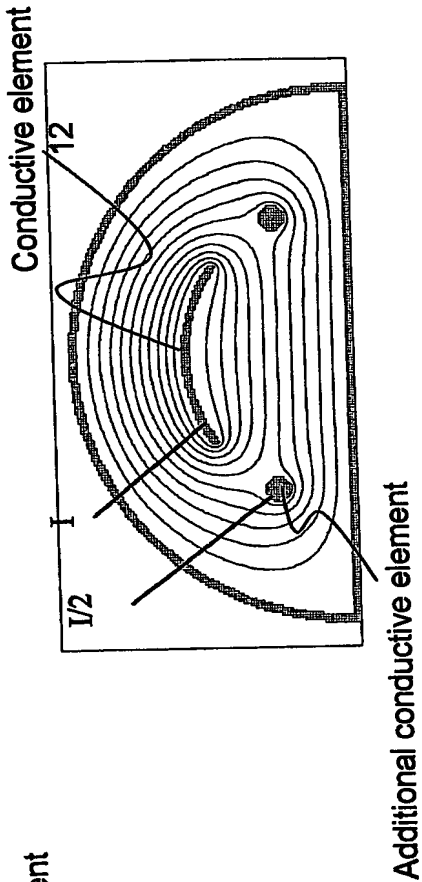

13

Fig. 12d

12/23

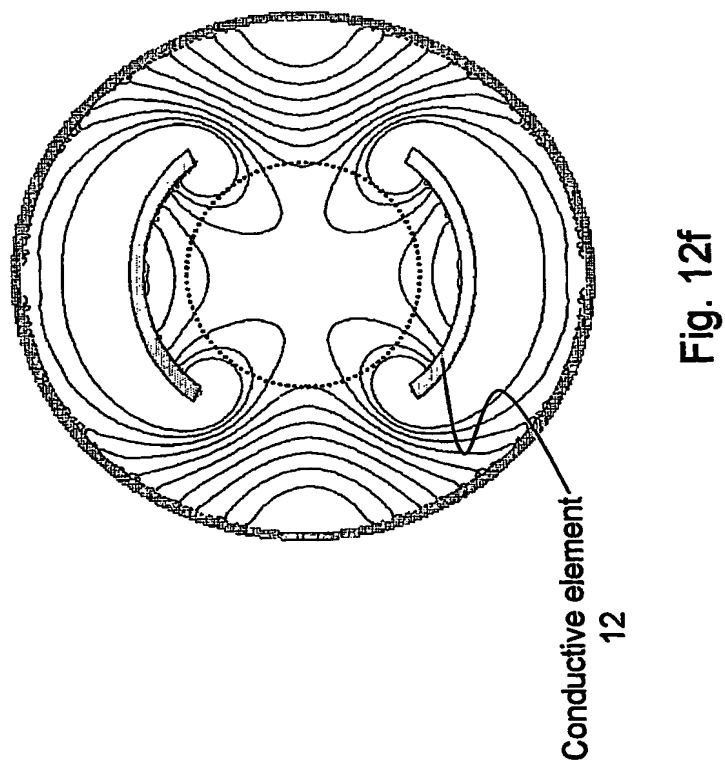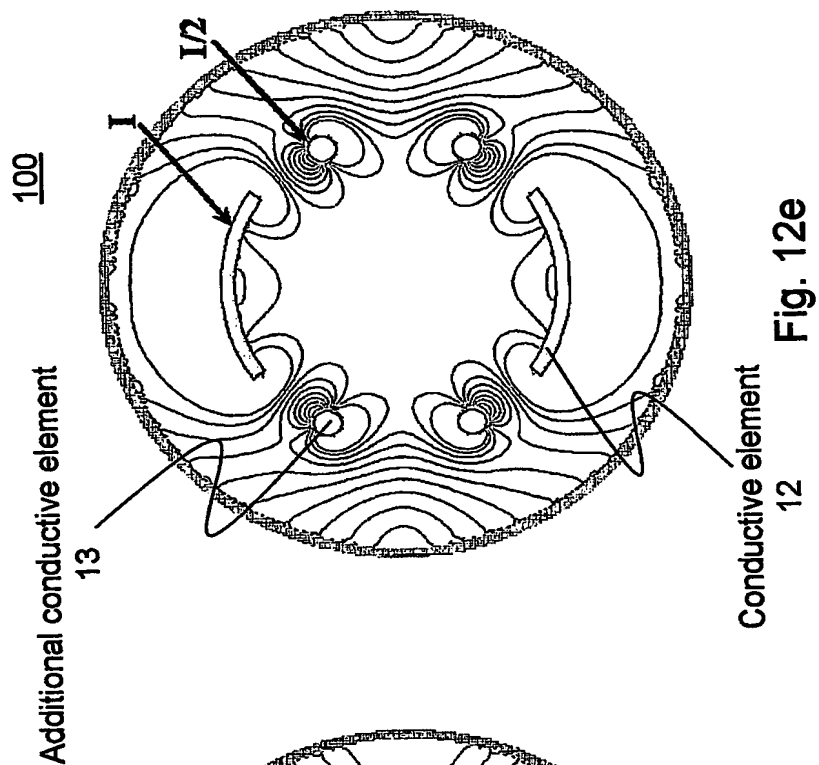

13/23

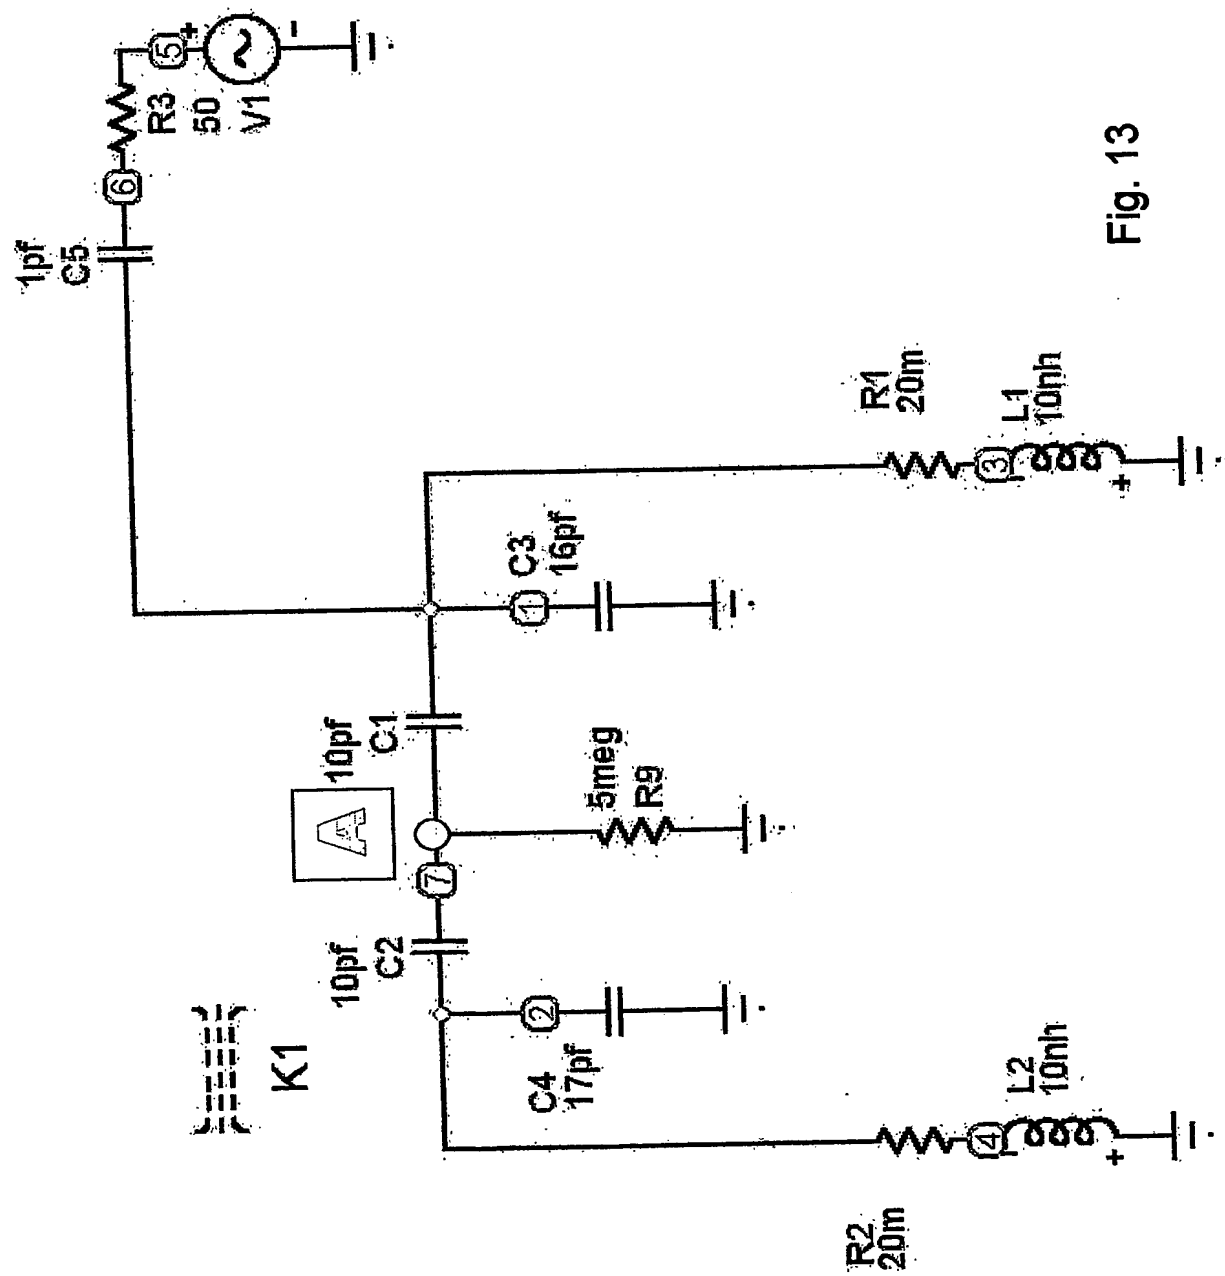


Fig. 13

14/23

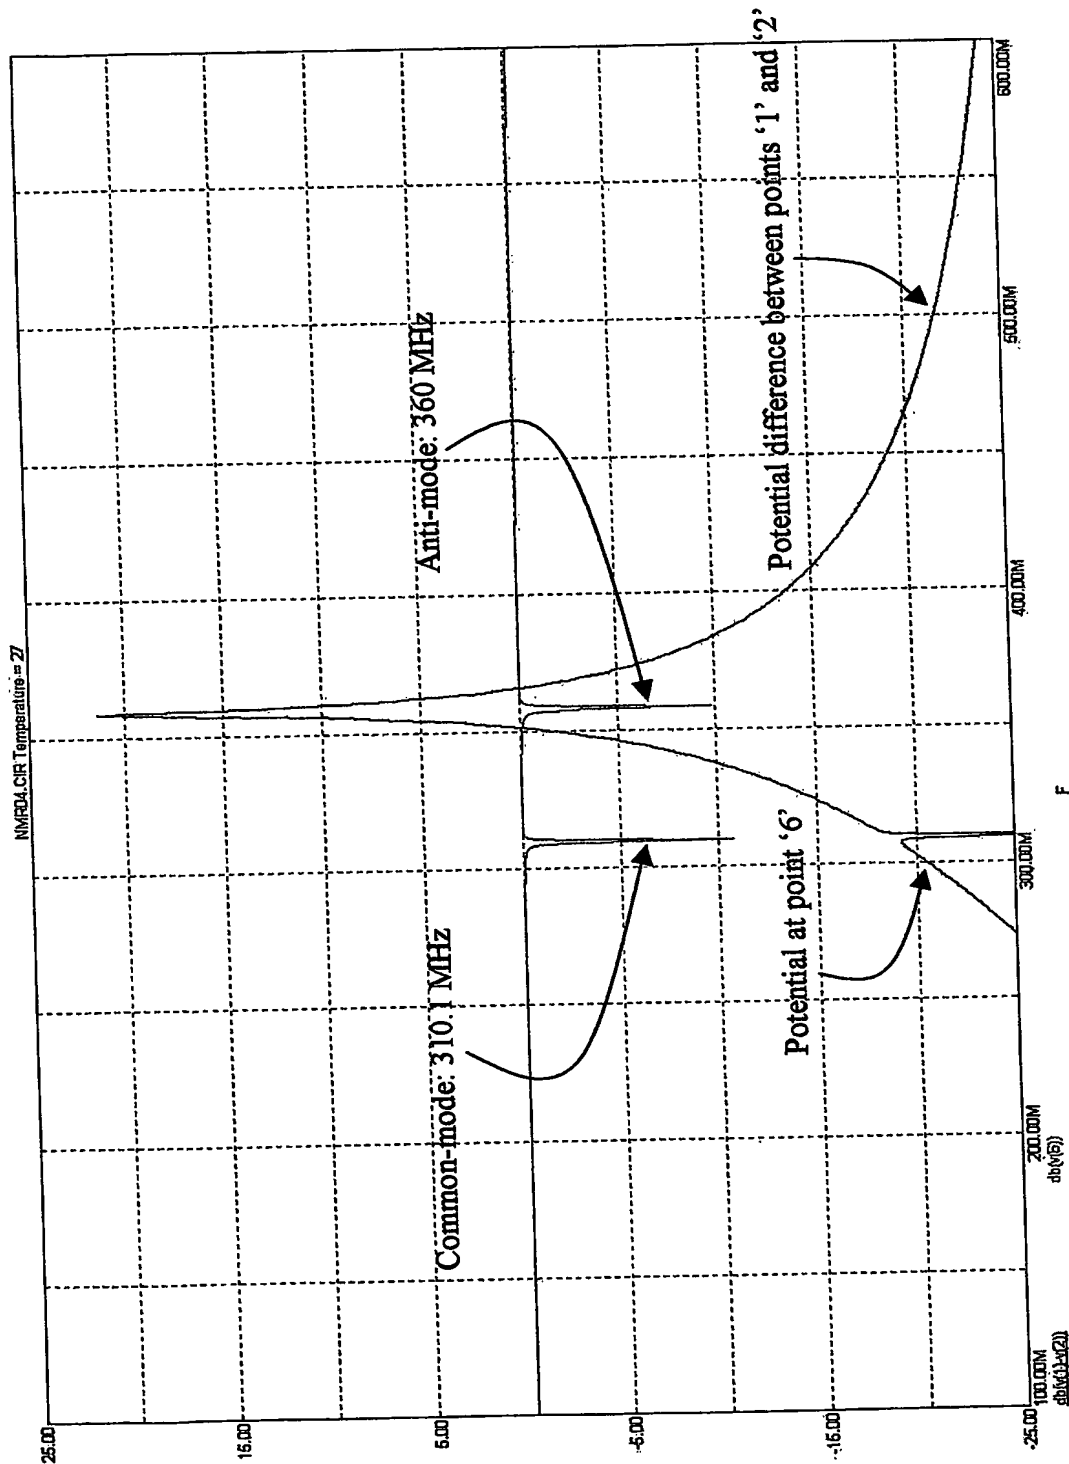


Fig. 14

15/23

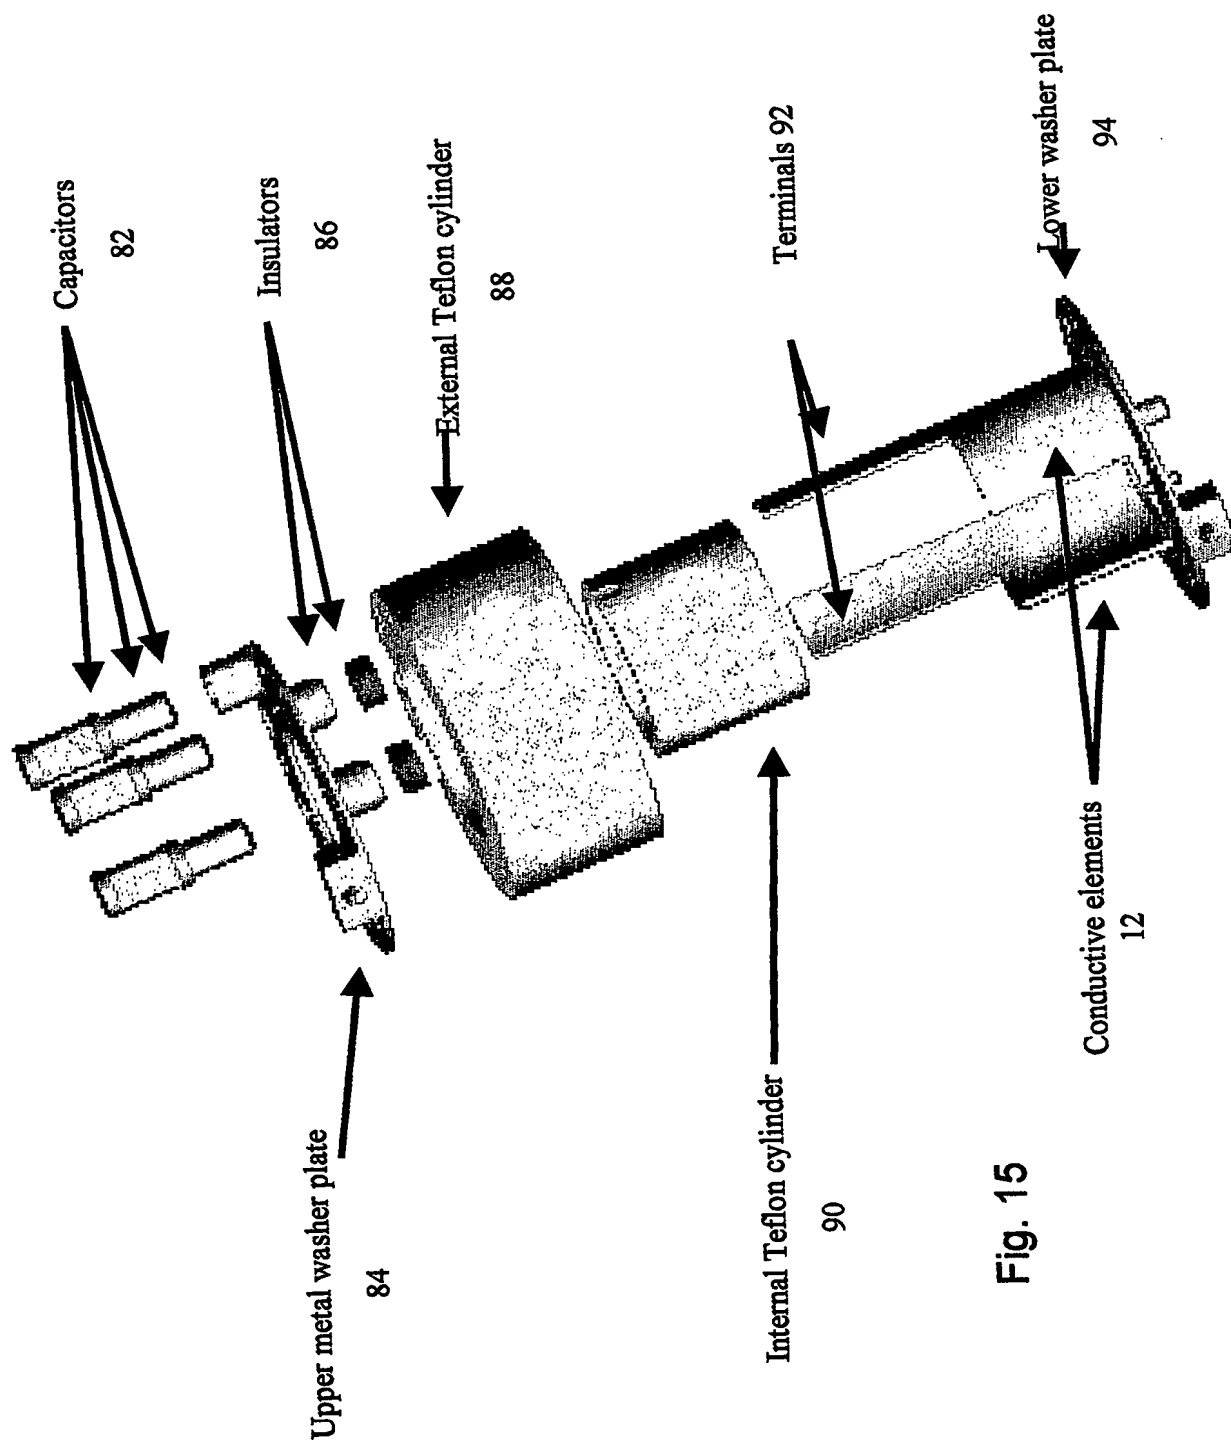


Fig. 15

16/23

Fig. 16a


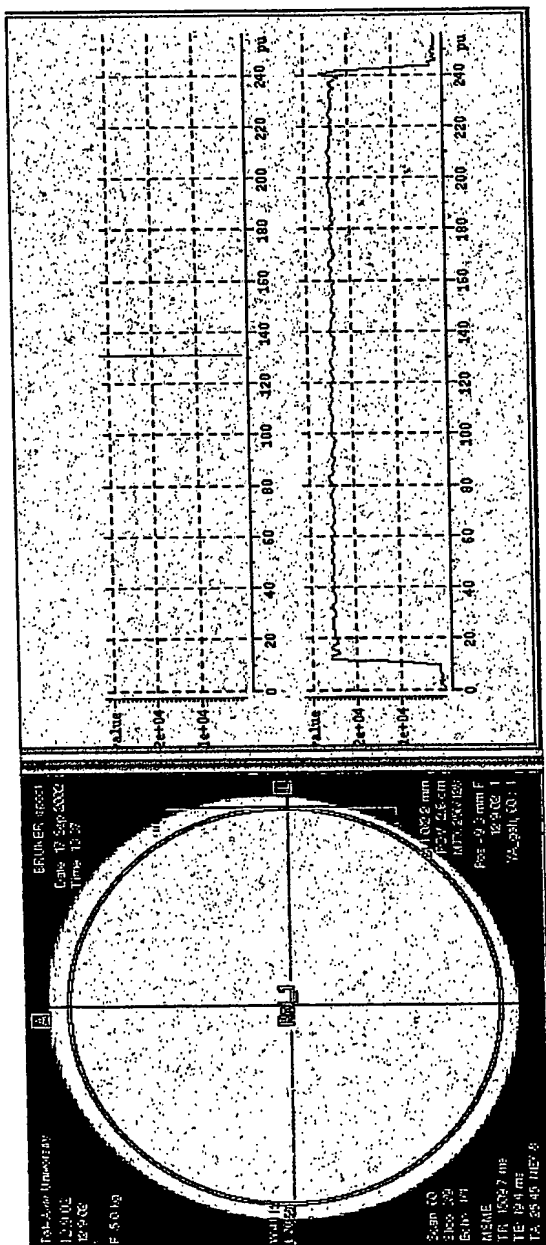


Fig. 16b

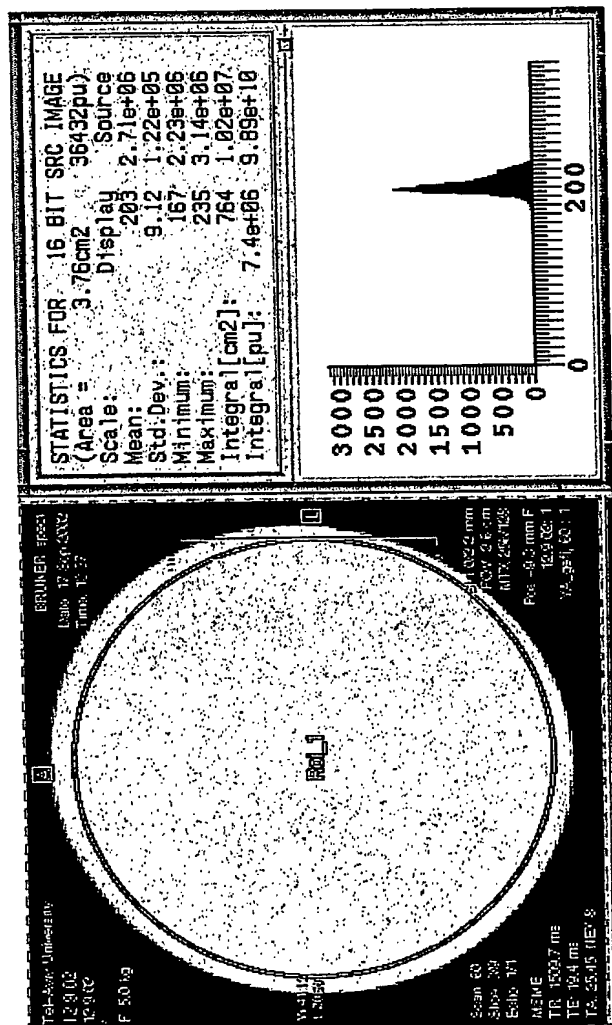

17/23

Fig. 17a

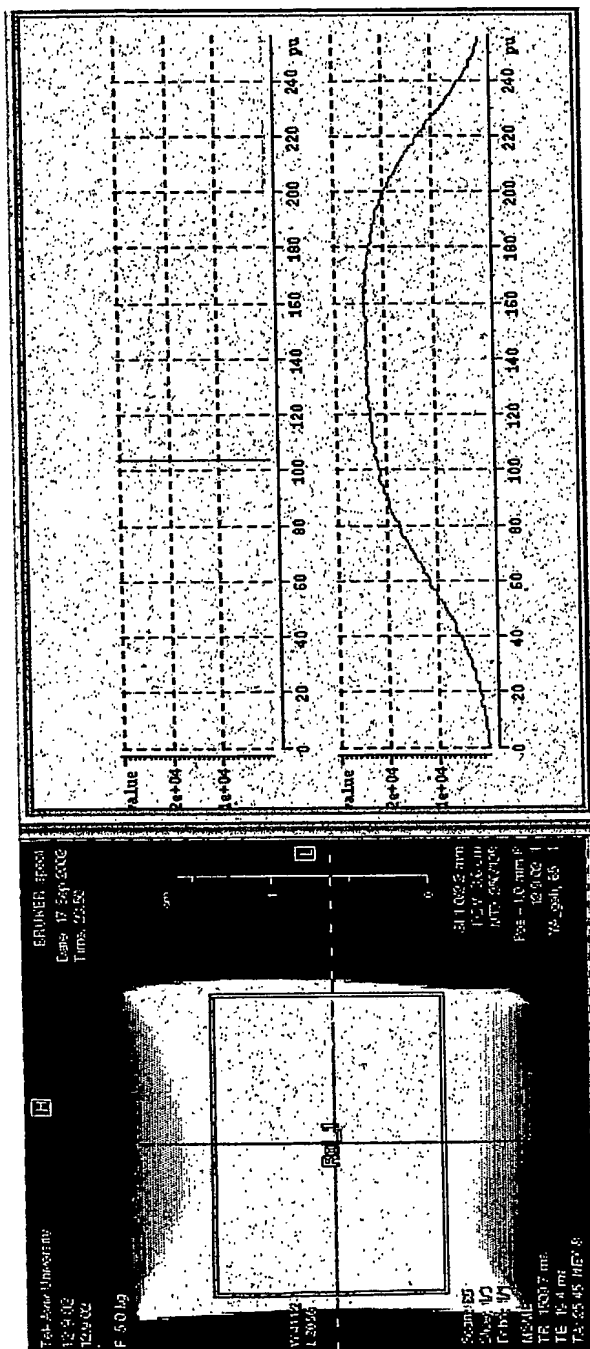


Fig. 17b

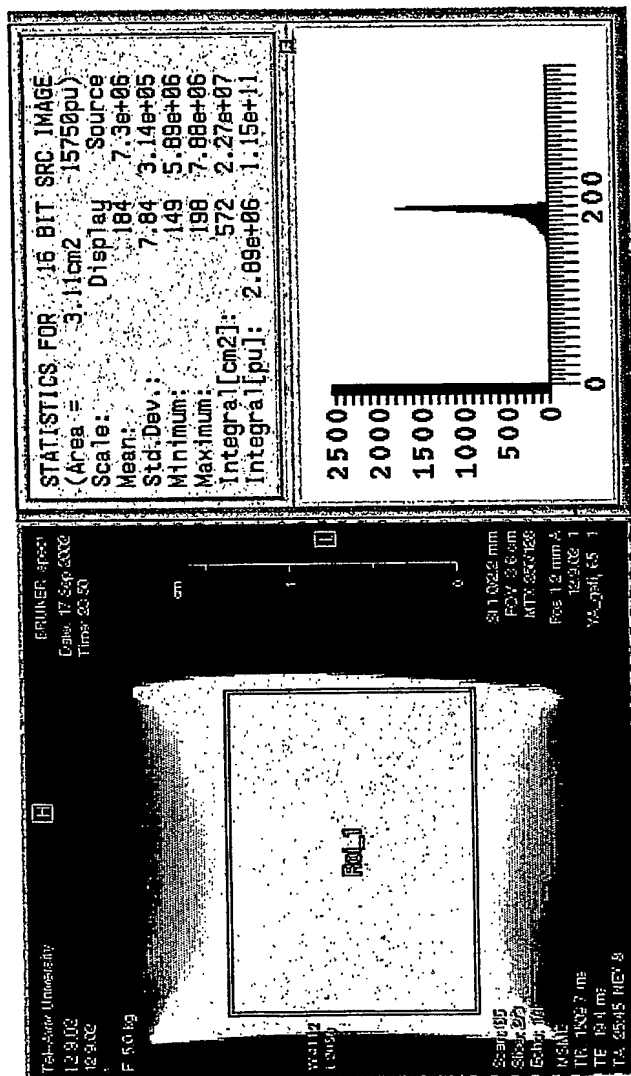


Fig. 18a


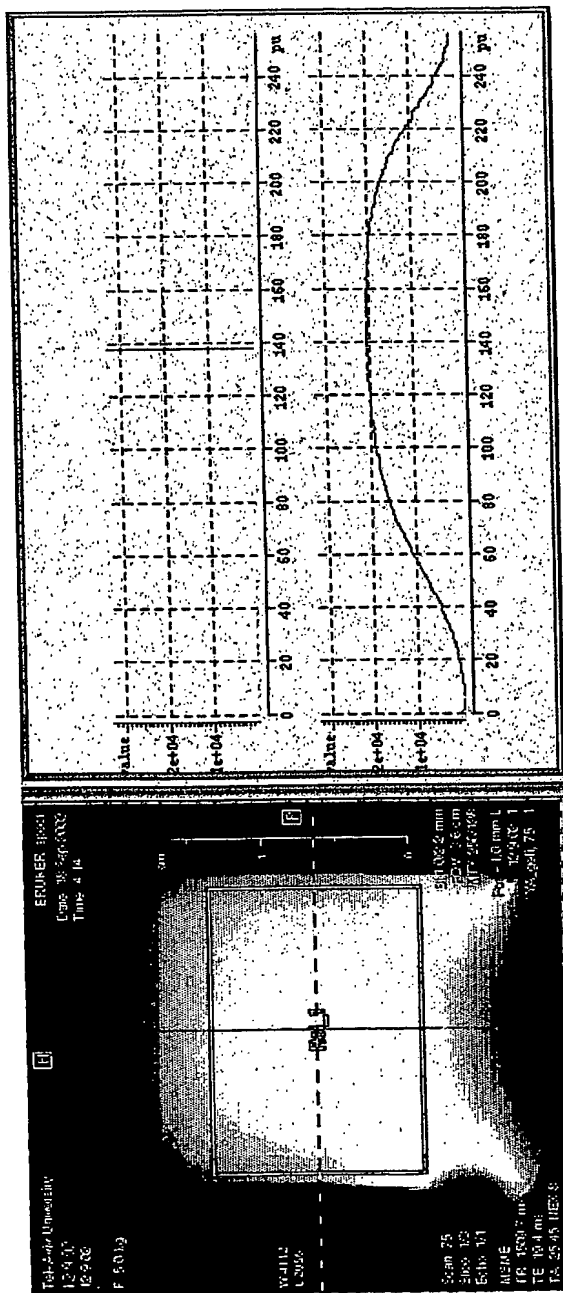


Fig. 18b

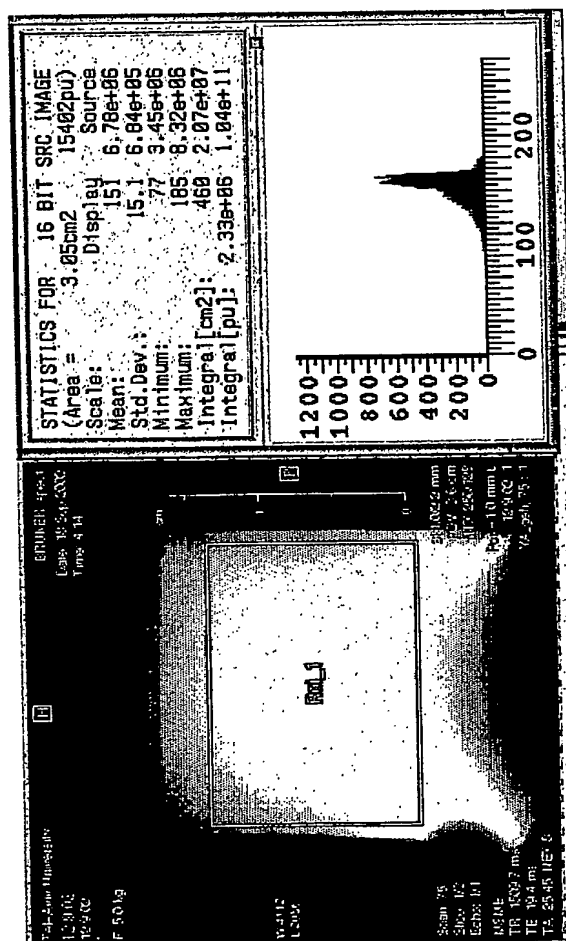

19/23

Fig. 19b

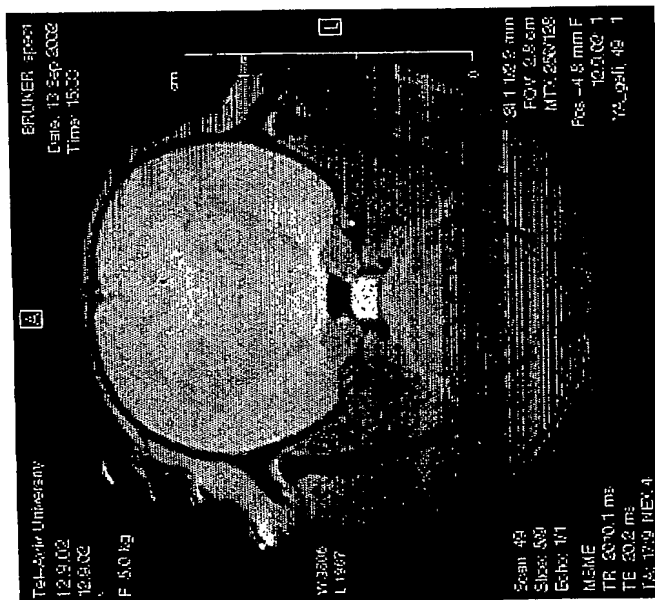


Fig. 19d

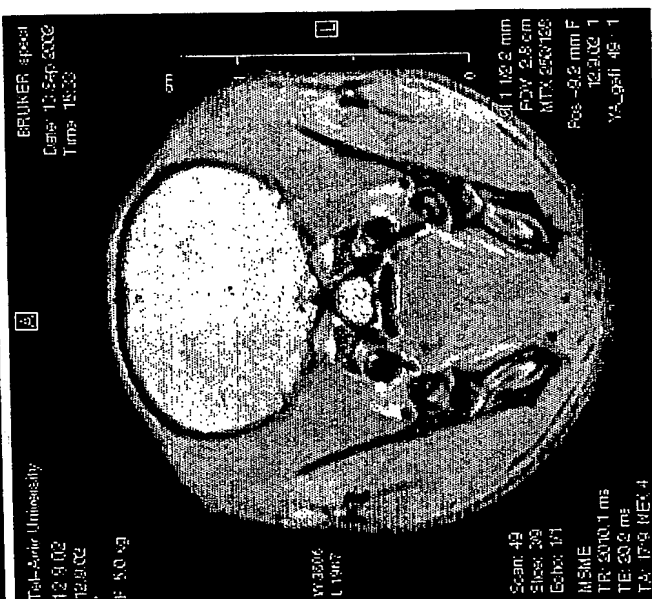


Fig. 19a


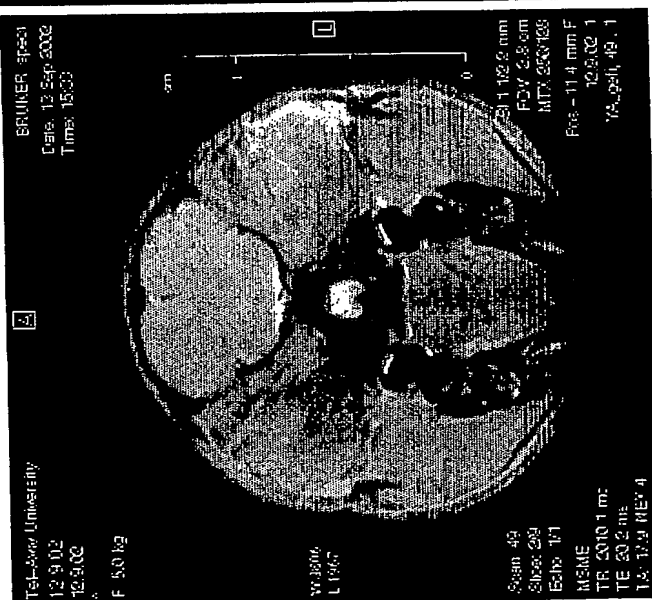


Fig. 19c

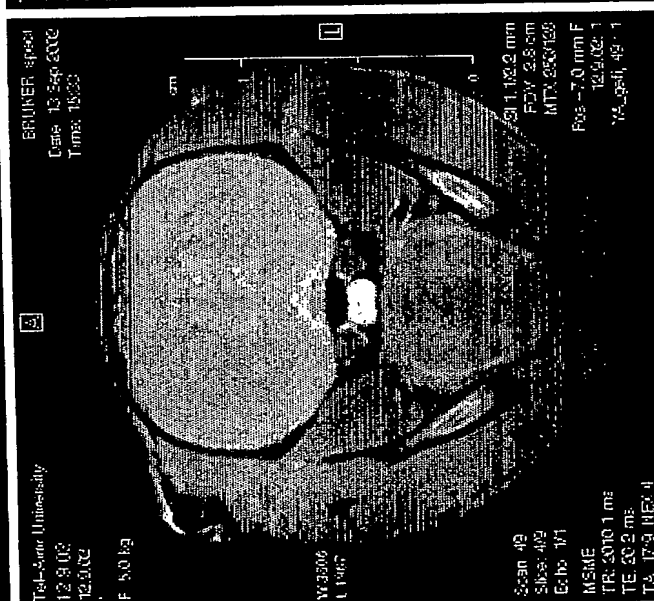

20/23

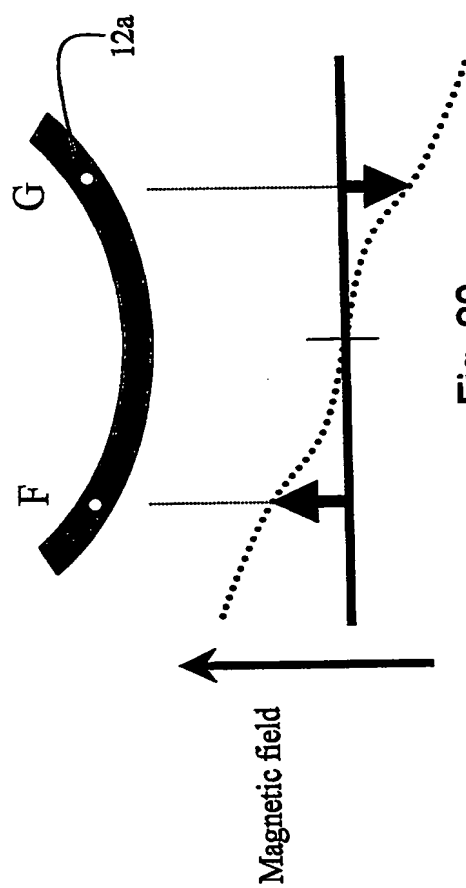
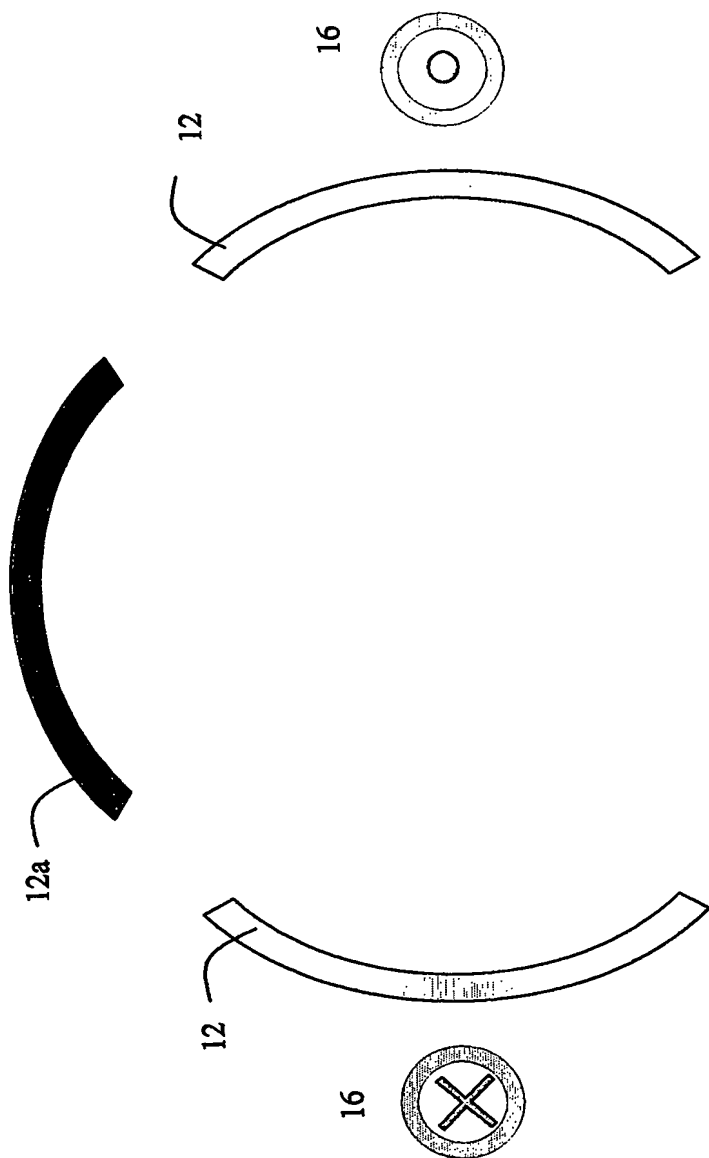


Fig. 20

21/23

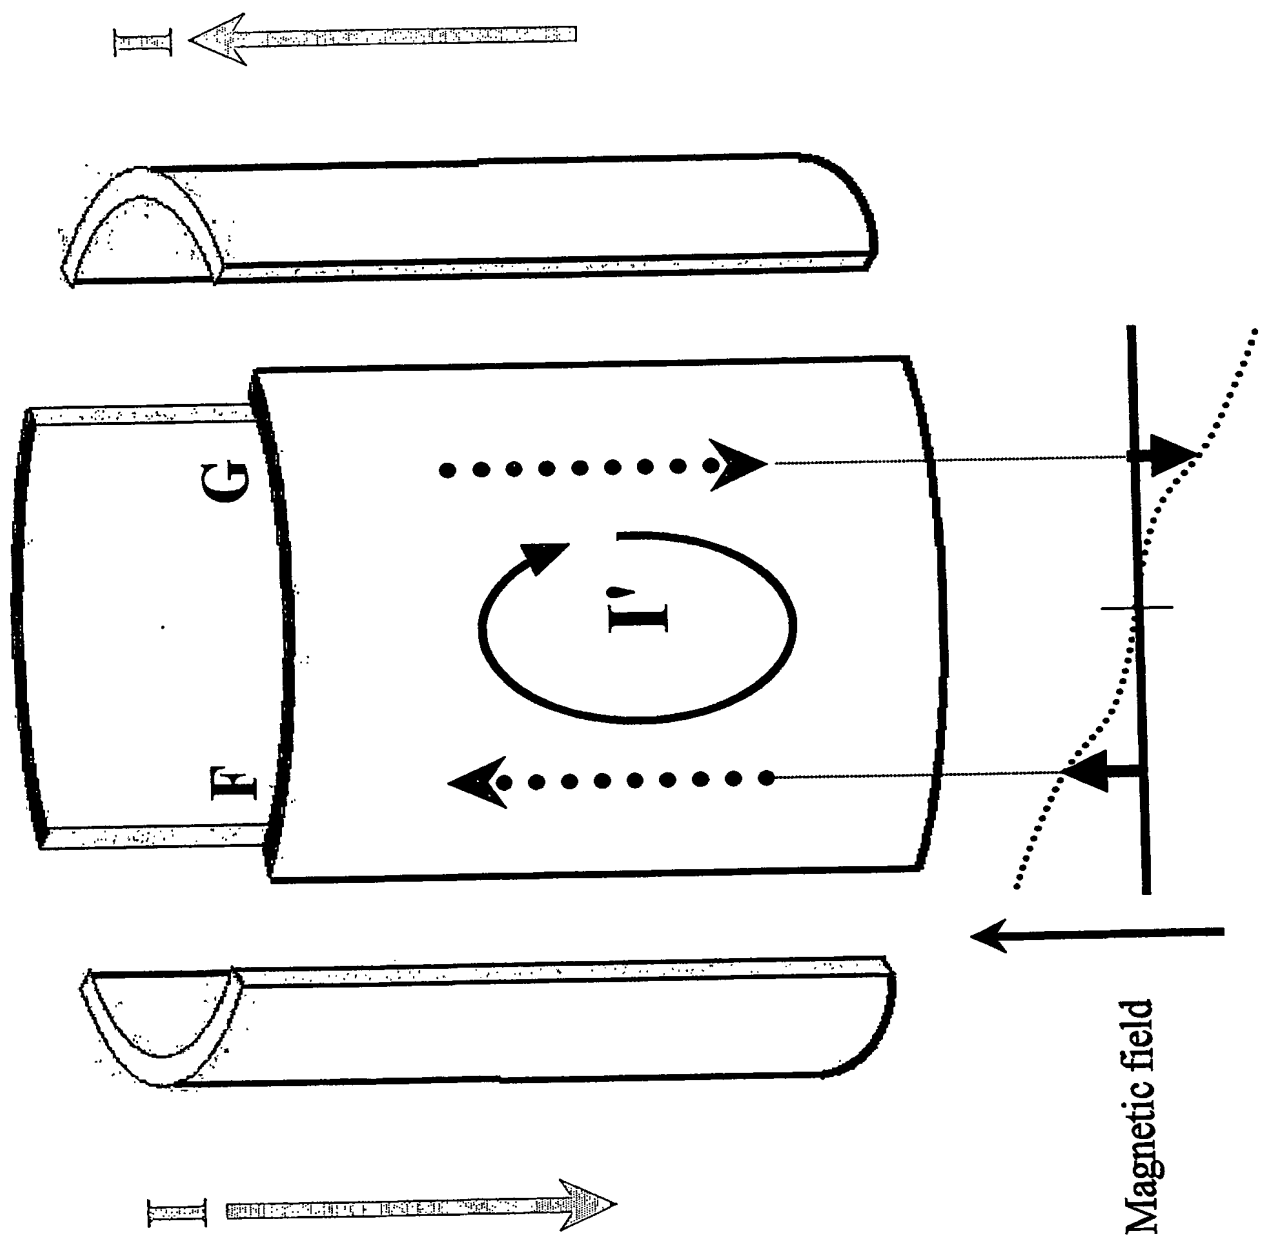


Fig. 21

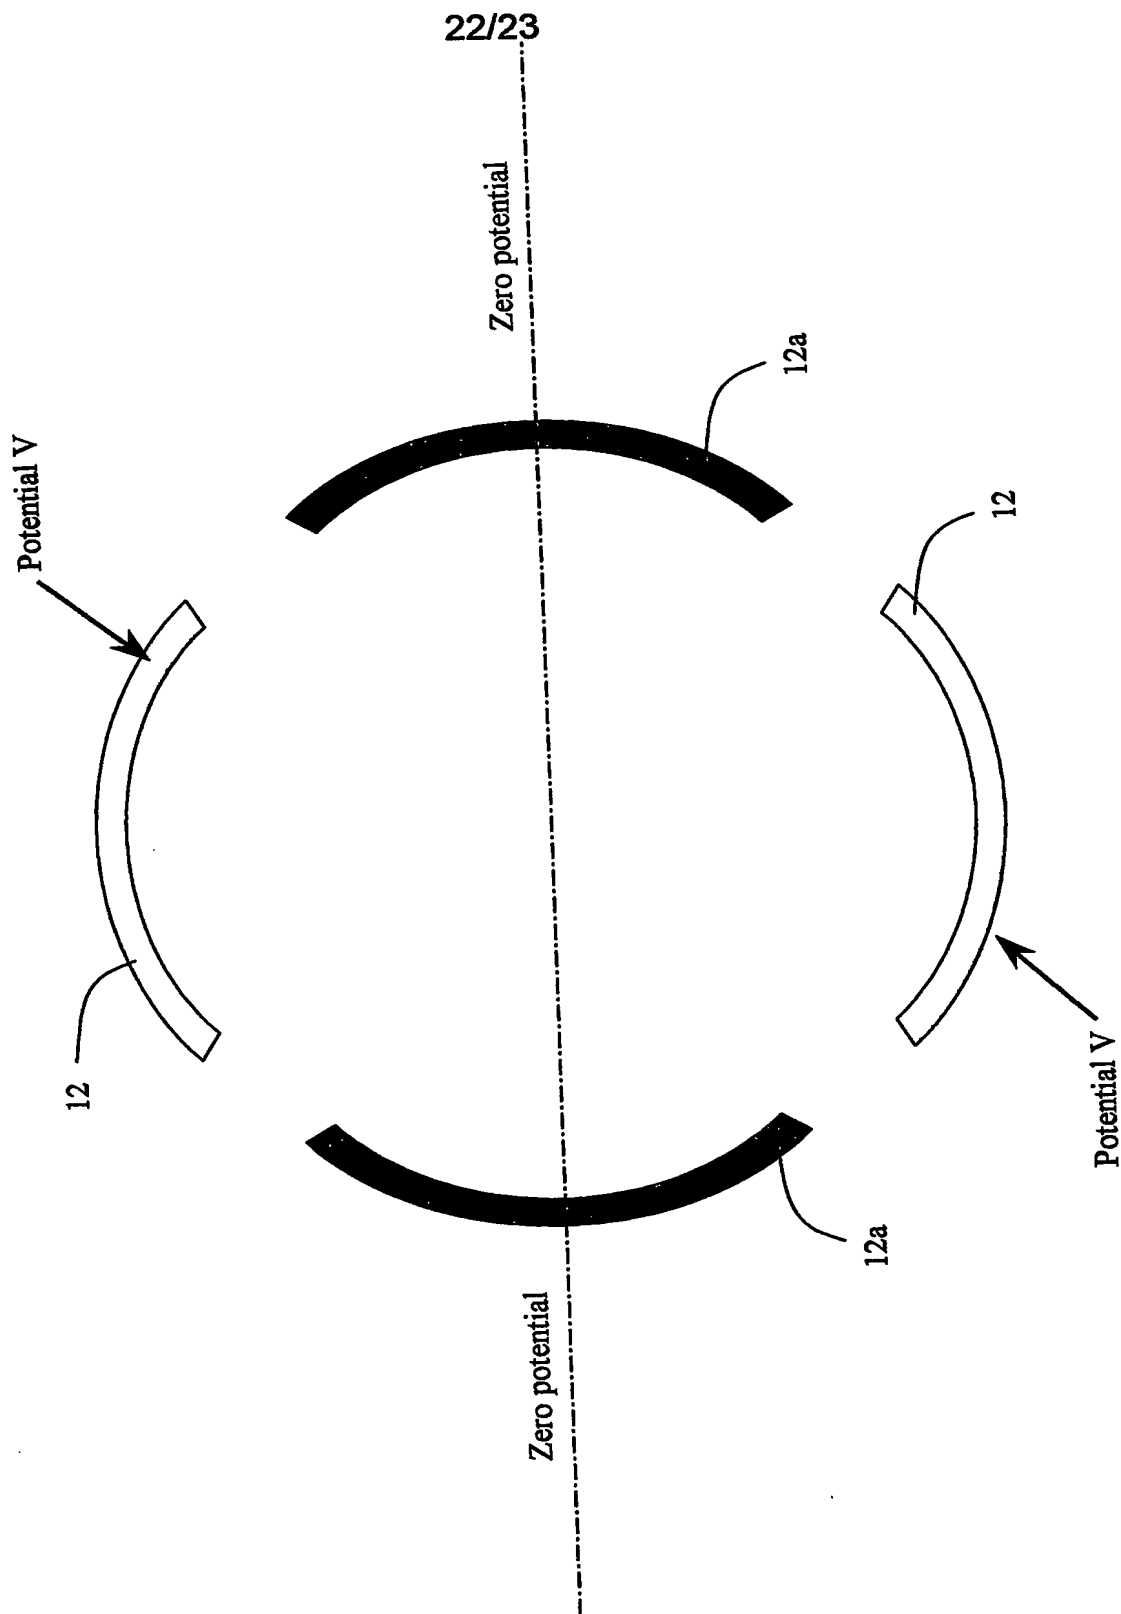


Fig. 22

23/23

Fig. 23a


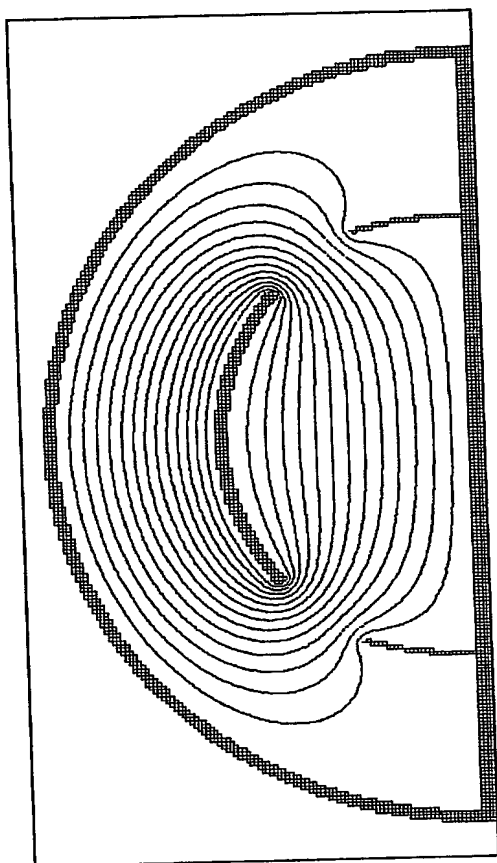


Fig. 23b

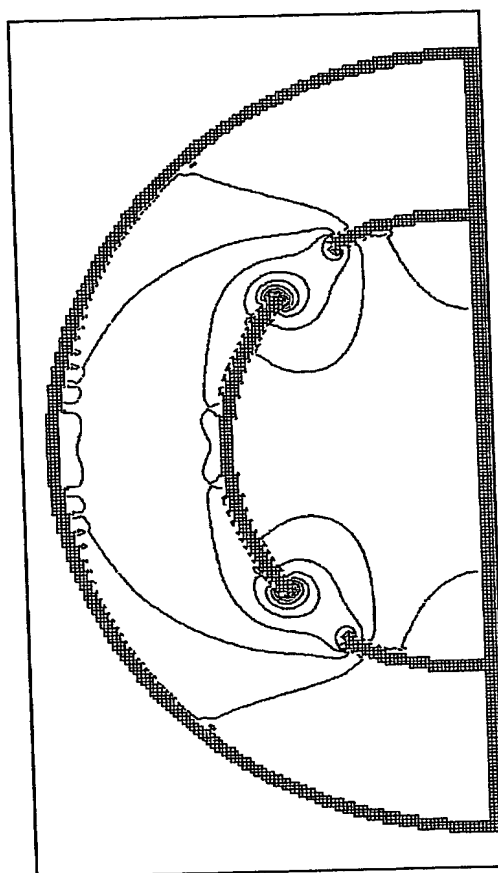

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference 26912	FOR FURTHER ACTION	see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.
International application No. PCT/IL03/00826	International filing date (day/month/year) 12 October 2003 (12.10.2003)	(Earliest) Priority Date (day/month/year) 17 October 2002 (17.10.2002)
Applicant RAMOT AT TEL AVIV UNIVERSITY LTD.		

This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This international search report consists of a total of 5 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the Report

- a. With regard to the language, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐

the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international search was carried out on the basis of the sequence listing:

☐

contained in the international application in written form.

☐

filed together with the international application in computer readable form.

☐

furnished subsequently to this Authority in written form.

☐

furnished subsequently to this Authority in computer readable form.

☐

the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐

the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

2. ☒ Certain claims were found unsearchable (See Box I).

3. ☒ Unity of invention is lacking (See Box II).

4. With regard to the title,

☒

the text is approved as submitted by the applicant.

☐

the text has been established by this Authority to read as follows:

5. With regard to the abstract,

☒

the text is approved as submitted by the applicant.

☐

the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the drawings to be published with the abstract is Figure No. 2

☐

as suggested by the applicant.

☐

None of the figures

☒

because the applicant failed to suggest a figure.

☐

because this figure better characterizes the invention.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL03/00826

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G01V 3/00; G01R 33/20

US CL : 324/318, 322; 600/422

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 324/300-322; 600/410-435

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
USPAT, USPGPUB, USOC, EPAB, JPAB, DWPI, TDBD, WEST 2.2

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X --- A	US 4,638,253 A (JASKOLSKI et al.) 20 January 1987 (20.01.1987), see entire document.	1-20,26-42,192- 210,216-230 ----- 21-25,211-215,
X --- A	US 6,437,567 B1 (SCHENCK et al.) 20 August 2002 (20.08.2002), see entire document.	1-20,26-42,192- 210,216-230 ----- 21-25,211-215
Y --- A	US 6,377,044 B1 (BURL et al.) 23 April 2002 (23.04.2002), see entire document.	1-20,26-42,192- 210,216-230 ----- 21-25,211-215
X,P --- A	US 6,501,274 B1 (LEDDEN) 31 December 2002 (31.12.2002), see entire document.	1-20,26-42,192- 210,216-230 ----- 21-25,211-215



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

30 July 2004 (30.07.2004)

Date of mailing of the international search report

10 AUG 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US

Commissioner for Patents

P.O. Box 1450

Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Gutierrez Diego

Telephone No. 571-272-2245

INTERNATIONAL SEARCH REPORT

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,E --- A	US 6,633,161 B1 (VAUGHAN, JR.) 14 October 2003 (14.10.2003), see entire document.	1-20,26-42,192- 210,216-230 ----- 21-25,211-215
X --- Y	US 4,654,592 A (ZENS) 31 March 1987 (31.03.1987) see entire document.	21-25, 211-215 ----- 1-20,26-42,192- 210,216-230
X --- Y	US 4,517,516 A (HILL et al.) 14 May 1985 (14.05.1985), see entire document.	21-25,211-215 ----- 1-20,26-42,192- 210,216-230

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING

The application contains the following inventions or groups of inventions, which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Invention Group I: Claims 1-42 and 192-230 is directed toward an RF resonator apparatus.

Invention Group II: Claims 43-85 drawn to a method of design/construction of an RF resonator to be used with magnetic resonance imaging.

Invention Group III: Claims 86-141 and 231-285 drawn to an MRI apparatus system.

Invention Group IV: Claims 142-191 drawn to a method for magnetic resonance imaging.

The inventions listed as Groups I, II, III and IV do not relate to a single general inventive concept under PCT rule 13.1 because, under PCT rule 13.2, they lack the same or corresponding special technical features for the following reasons:

Group I corresponds to an RF resonator, which does not require magnetic resonance specific components. In Group I the ability to use the RF resonator with an MRI system is intended use. Many other area including radio, television, telecommunications, and electromagnetic systems also use RF resonators. The search for Group I is very different from the search required for Groups II, III and IV, which are MRI specific.

Groups II and IV are different than Group I because they require specifics connected specifically to magnetic resonance imaging, that the RF resonator of Group I lacks. Groups II and IV further limit Group I.

Group III is different than Group II because the claims of Group III require that all the components of a magnetic resonance imaging system/apparatus are limitations of the claims, while Group II focuses only on the RF resonator's design and applicability to conventional MRI systems. Actual MRI system components are not required.

Group II is different than Group IV because the claims of Group IV require that a complete MRI method analysis be performed, with all required MRI steps, while the Group II claims just require the RF resonator to be functional with an MRI system. No actual MRI scans or imaging are required or performed in Group II.

Group III is different than Group IV because MRI apparatus, systems (i.e. Group III) are found in classes 324/318-322 and 600/422-435 while MRI apparatus, systems (i.e. Group IV) are found in classes 324/300-317; 600/410-421.

CHAPTER I
PCT TELEPHONE MEMORANDUM
FOR
LACK OF UNITY OF INVENTION



PCT No.: PCT/IL03/00826

Examiner: Sharon S. Hoppe

Attorney spoken to: SOL SHEINBEIN

Date of call: 22 MARCH 2004

☐ Amount of payment approved:

☐ Deposit account number to be charged:

☐ Attorney elected to pay for ALL additional inventions

☐ Attorney elected to pay only for the additional inventions covered by

☐ Group(s):

-- encompassing --

☐ Claim(s):

☒ Attorney elected NOT to pay for any additional inventions, therefore, only the first claimed invention (Group I) covered by Claim(s) 1-42 and 192-230 has been searched.

☒ Attorney was orally advised that there is no right to protest for any group not paid for.

☒ Attorney was orally advised that any protest must be filed no later than 15 days from the mailing of the Search Report (PCT/ISA/210).

Time Limit For Filing A Protest

Applicant is hereby given 15 days from the mailing date of this Search Report in which to file a protest of the holding of lack of unity of invention. In accordance with PCT Rule 40.2, applicant may protest the holding of lack of unity only with respect to the group(s) paid for.

Detailed Reasons For Holding Lack of Unity of Invention:

Please See Continuation Sheet

Note: A copy of this form must be attached to the Search Report.

ATTACHMENT TO CHAPTER I PCT TELEPHONE MEMORANDUM FOR LACK OF UNITY OF INVENTION

Continuation of Detailed Reasons For Holding Lack of Unity of Invention:

The application contains the following inventions or groups of inventions, which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Invention Group I: Claims 1-42 and 192-230 is directed toward an RF resonator apparatus.

Invention Group II: Claims 43-85 drawn to a method of design/construction of an RF resonator to be used with magnetic resonance imaging.

Invention Group III: Claims 86-141 and 231-285 drawn to an MRI apparatus system.

Invention Group IV: Claims 142-191 drawn to a method for magnetic resonance imaging.

The inventions listed as Groups I, II, III and IV do not relate to a single general inventive concept under PCT rule 13.1 because, under PCT rule 13.2, they lack the same or corresponding special technical features for the following reasons:

Group I corresponds to an RF resonator, which does not require magnetic resonance specific components. In Group I the ability to use the RF resonator with an MRI system is intended use. Many other area including radio, television, telecommunications, and electro-magnetic systems also use RF resonators. The search for Group I is very different from the search required for Groups II, III and IV, which are MRI specific.

Groups II and IV are different than Group I because they require specifics connected specifically to magnetic resonance imaging, that the RF resonator of Group I lacks. Groups II and IV further limit Group I.

Group III is different than Group II because the claims of Group III require that all the components of a magnetic resonance imaging system/apparatus are limitations of the claims, while Group II focuses only on the RF resonator's design and applicability to conventional MRI systems. Actual MRI system components are not required.

Group II is different than Group IV because the claims of Group IV require that a complete MRI method analysis be performed, with all required MRI steps, while the Group II claims just require the RF resonator to be functional with an MRI system. No actual MRI scans or imaging are required or performed in Group II.

Group III is different than Group IV because MRI apparatus, systems (i.e. Group III) are found in classes 324/318-322 and 600/422-435 while MRI apparatus, systems (i.e. Group IV) are found in classes 324/300-317; 600/410-421.

Note: A copy of this form must be attached to the Search Report.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 April 2004 (29.04.2004)

PCT

(10) International Publication Number
WO 2004/036229 A3

(51) International Patent Classification⁷: **G01V 3/00**,
G01R 33/20

(21) International Application Number:
PCT/IL2003/000826

(22) International Filing Date: 12 October 2003 (12.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/418,707 17 October 2002 (17.10.2002) US
60/437,452 2 January 2003 (02.01.2003) US

(71) Applicant (for all designated States except US): **RAMOT
AT TEL AVIV UNIVERSITY LTD.** [IL/IL]; 32 Haim
Levanon Street, 69 975 Tel Aviv (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **NEUFELD, Arnon**

[IL/IL]; 20 Harugey Malcot Street, 69 714 Tel Aviv (IL).
LEVIN, Menahem [IL/IL]; 77 Herzl Street, 52 421 Ra-
mat Gan (IL). **NAVON, Gil** [IL/IL]; 24 HaMeiri Street, 52
651 Ramat Gan (IL).


(74) Agent: **G. E. EHRLICH (1995) LTD.**; 11 Menachem Be-
gin Street, 52 521 Ramat Gan (IL).

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, EG, ES, FI (utility model), FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: A RADIOFREQUENCY MAGNETIC FIELD RESONATOR AND A METHOD OF DESIGNING THE SAME

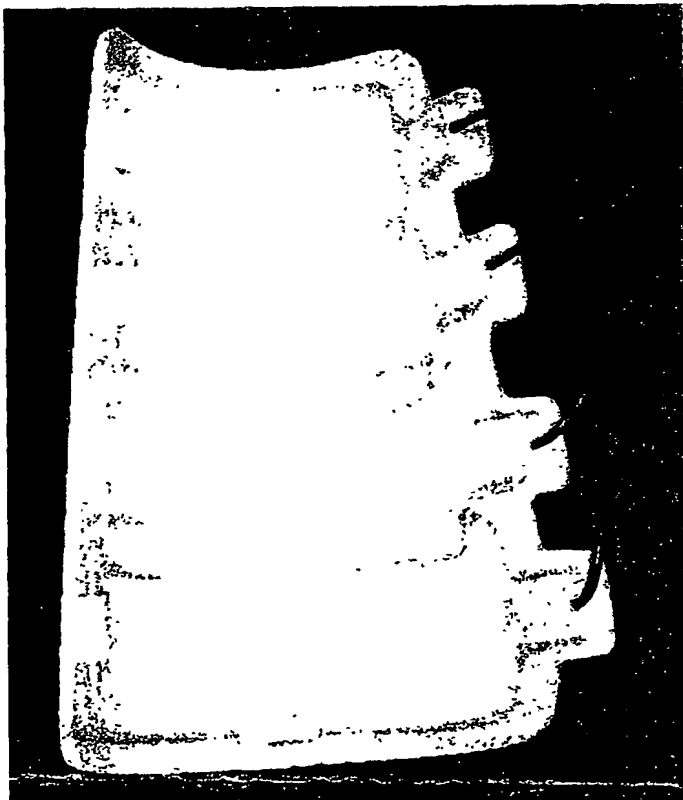

(57) Abstract: A radiofrequency (RF) resonator for magnetic resonance analysis, the RF resonator comprising: (a) at least two conductive elements, each having a first curvature along a direction perpendicular to a longitudinal axis, the at least two conductive elements being spaced along the longitudinal axis, so that when an RF current flows within the at least two conductive elements in a direction of the longitudinal axis, a substantially homogenous RF magnetic field, directed perpendicular to the longitudinal axis, is produced in a volume defined between the at least two conductive elements. The RF resonator further comprises (b) an electronic circuitry designed and configured for providing predetermined resonance characteristics of the RF resonator, for matching an impedance of the RF resonator to an impedance of an RF transmitter electrically communicating with the electronic circuitry, and for balancing the RF magnetic field to have a substantially symmetrical profile with respect to a transverse axis being perpendicular to the longitudinal axis.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:
16 September 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL03/00826

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G01V 3/00; G01R 33/20

US CL : 324/318, 322; 600/422

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 324/300-322; 600/410-435

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
USPAT, USPGPUB, USOC, EPAB, JPAB, DWPI, TDBD, WEST 2.2

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X — A	US 4,638,253 A (JASKOLSKI et al.) 20 January 1987 (20.01.1987), see entire document.	1-20,26-42,192-210,216-230 — 21-25,211-215,
X — A	US 6,437,567 B1 (SCHENCK et al.) 20 August 2002 (20.08.2002), see entire document.	1-20,26-42,192-210,216-230 — 21-25,211-215
Y — A	US 6,377,044 B1 (BURL et al.) 23 April 2002 (23.04.2002), see entire document.	1-20,26-42,192-210,216-230 — 21-25,211-215
X,P — A	US 6,501,274 B1 (LEDDEN) 31 December 2002 (31.12.2002), see entire document.	1-20,26-42,192-210,216-230 — 21-25,211-215



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

30 July 2004 (30.07.2004)

Date of mailing of the international search report

10 AUG 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Authorized officer

Gutierrez Diego

Telephone No. 571-272-2245

INTERNATIONAL SEARCH REPORT

PCT/IL03/00826

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,B — A	US 6,633,161 B1 (VAUGHAN, JR.) 14 October 2003 (14.10.2003), see entire document.	1-20,26-42,192- 210,216-230 — 21-25,211-215
X — Y	US 4,654,592 A (ZENS) 31 March 1987 (31.03.1987) see entire document.	21-25, 211-215 — 1-20,26-42,192- 210,216-230
X — Y	US 4,517,516 A (HILL et al.) 14 May 1985 (14.05.1985), see entire document.	21-25,211-215 — 1-20,26-42,192- 210,216-230

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL03/00826

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claim Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claim Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claim Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:
Please See Continuation Sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: 1-42 and 192-230

Remark on Protest

☐
☐

The additional search fees were accompanied by the applicant's protest.

No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

PCT/IL03/00826

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION IS LACKING

The application contains the following inventions or groups of inventions, which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

Invention Group I: Claims 1-42 and 192-230 is directed toward an RF resonator apparatus.

Invention Group II: Claims 43-85 drawn to a method of design/construction of an RF resonator to be used with magnetic resonance imaging.

Invention Group III: Claims 86-141 and 231-285 drawn to an MRI apparatus system.

Invention Group IV: Claims 142-191 drawn to a method for magnetic resonance imaging.

The inventions listed as Groups I, II, III and IV do not relate to a single general inventive concept under PCT rule 13.1 because, under PCT rule 13.2, they lack the same or corresponding special technical features for the following reasons:

Group I corresponds to an RF resonator, which does not require magnetic resonance specific components. In Group I the ability to use the RF resonator with an MRI system is intended use. Many other area including radio, television, telecommunications, and electro-magnetic systems also use RF resonators. The search for Group I is very different from the search required for Groups II, III and IV, which are MRI specific.

Groups II and IV are different than Group I because they require specifics connected specifically to magnetic resonance imaging, that the RF resonator of Group I lacks. Groups II and IV further limit Group I.

Group III is different than Group II because the claims of Group III require that all the components of a magnetic resonance imaging system/apparatus are limitations of the claims, while Group II focuses only on the RF resonator's design and applicability to conventional MRI systems. Actual MRI system components are not required.

Group II is different than Group IV because the claims of Group IV require that a complete MRI method analysis be performed, with all required MRI steps, while the Group II claims just require the RF resonator to be functional with an MRI system. No actual MRI scans or imaging are required or performed in Group II.

Group III is different than Group IV because MRI apparatus, systems (i.e. Group III) are found in classes 324/318-322 and 600/422-435 while MRI apparatus, systems (i.e. Group IV) are found in classes 324/300-317; 600/410-421.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.